

# **OPERATION & MAINTENANCE MANUAL**

**DFI No. : D00524**  
**Facility Type: Water Quality**  
**Biofiltration Swale**



**October, 2017**

**INDEX**

**1. IDENTIFICATION..... 1**

**2. FACILITY CONTACT INFORMATION..... 1**

**3. CONSTRUCTION..... 1**

**4. STORM DRAIN SYSTEM AND FACILITY OVERVIEW ..... 1**

**5. FACILITY HAZ MAT SPILL FEATURE(S)..... 2**

**6. AUXILIARY OUTLET (HIGH FLOW BYPASS)..... 2**

**7. MAINTENANCE REQUIREMENTS..... 3**

**8. WASTE MATERIAL HANDLING..... 3**

**APPENDIX A: Operational Plan and Profile Drawing(s)**

**APPENDIX B: ODOT Project Plan Sheets**

## 1. Identification

Drainage Facility ID (DFI): **D00524**  
Facility Type: Water Quality Biofiltration Swale  
Construction Drawings: 44V-057  
Location: District: 08  
Highway No.: 272  
Mile Post Beg./End: MP 4.10 to MP 4.13  
Description: This facility is located along the shoulder of OR 238 at the intersection of Jaynes Drive and OR 238.

## 2. Facility Contact Information

Contact the Engineer of Record, Region Technical Center, or Geo-Environmental's Senior Hydraulics Engineer for:

- Operational clarification
- Maintenance clarification
- Repair or restoration assistance

### Engineering Contacts:

Region Technical Center Hydro Unit Manager

Or

Geo-Environmental Senior Hydraulics Engineer (503) 986-3365.

## 3. Construction

Engineer of Record: Chris Zelmer – Region 3 Tech Center, White City, (541) 864-8812

Facility construction: 2016

Contractor: N/A

## 4. Storm Drain System and Facility Overview

A water quality swale is a flat-bottomed open channel designed to treat stormwater runoff from highway pavement areas. This type of facility is lined with grass. Treatment by trapping sedimentation occurs when stormwater runoff flows through the grass.

This facility is located along the shoulder of southbound of OR 238 (No. 272). Access for this facility is available from the southbound shoulder of OR . Stormwater enters the facility via roadway runoff and a stormwater ditch located along the southbound OR 238. As the water flows through the swale it is treated as it slows and spreads out within the swale before outfalling into an existing stormwater culvert.

A. Maintenance equipment access:

This facility can be accessed from the northbound shoulder of OR 238 (Hwy 272).

B. Heavy equipment access into facility:

- Allowed (no limitations)
- Allowed (with limitations)
- Not allowed

C. Special Features:

- Amended Soils
- Porous Pavers
- Liners
- Underdrains

**5. Facility Haz Mat Spill Feature(s)**

The water quality biofiltration swale can be used to store a volume of liquid by blocking the facility outlet through use of sandbags.

**6. Auxiliary Outlet (High Flow Bypass)**

Auxiliary Outlets are provided if the primary outlet control structure can not safely pass the projected high flows. Broad-crested spillway weirs and over flow risers are the two most common auxiliary outlets used in stormwater treatment facility design. The auxiliary outlet feature is either a part of the facility or an additional storm drain feature/structure.

The auxiliary outlet feature for this facility is:

Designed into facility

Other

There are no auxiliary outlets built into this facility. In the event that flows exceed design flows the water will overtop the swale.

## 7. Maintenance Requirements

Routine maintenance table for non-proprietary stormwater treatment and storage/detention facilities have been incorporated into ODOT's Maintenance Guide. These tables summarize the maintenance requirements for ponds, swales, filter strips, bioslopes, and detention tanks and vaults. Special maintenance requirements in addition to the routine requirements are noted below when applicable.

The ODOT Maintenance Guide can be viewed at the following website:

<http://www.oregon.gov/ODOT/HWY/OOM/MGuide.shtml>

Maintenance requirements for proprietary structures, such as underground water quality manholes and/or vaults with filter media are noted in Appendix C when applicable.

The following stormwater facility maintenance table (See ODOT Maintenance Guide) should be used to maintain the facility outlined in this Operation and Maintenance Manual or follow the Maintenance requirements outlined in Appendix C when proprietary structure is selected below:

- Table 1 (general maintenance)
- Table 2 (stormwater ponds)
- Table 3 (water quality biofiltration swales)
- Table 4 (water quality filter strips)
- Table 5 (water quality bioslopes)
- Table 6 (detention tank)
- Table 7 (detention vault)
- Appendix C (proprietary structure)
- Special Maintenance requirements:

Note: Special maintenance Requirements Require Concurrence from ODOT SR Hydraulics Engineer.

## 8. Waste Material Handling

Material removed from the facility is defined as waste by the Department of Environmental Quality (DEQ). Refer to the roadwaste section of the ODOT Maintenance Yard Environmental Management System (EMS) Policy and Procedures Manual for disposal options:

[http://www.oregon.gov/ODOT/Maintenance/Documents/ems\\_manual.pdf](http://www.oregon.gov/ODOT/Maintenance/Documents/ems_manual.pdf)




Contact any of the following for more detailed information about management of waste materials found on site:

ODOT Clean Water Unit	(503) 986-3008
ODOT Statewide Hazmat Coordinator	(503) 667-7442
ODOT Region 1 Hazmat Coordinator	(503) 731-8290
ODOT Region 2 Hazmat Coordinator	(503) 986-2647
ODOT Region 3 Hazmat Coordinator	(541) 957-3594
ODOT Region 4 Hazmat Coordinator	(541) 388-6186
ODOT Region 5 Hazmat Coordinator	(541) 963-1590
ODEQ Northwest Region Office	(503) 229-5263


# Appendix A

## Content:

- **Operational Plan and Profile Drawing(s)**

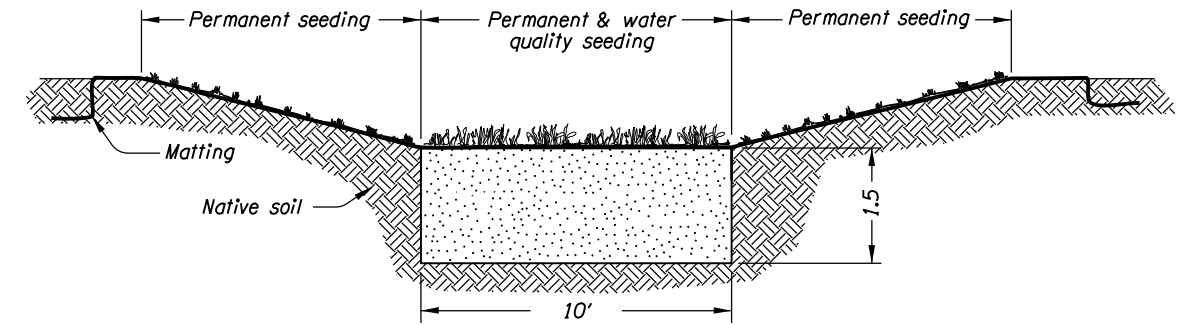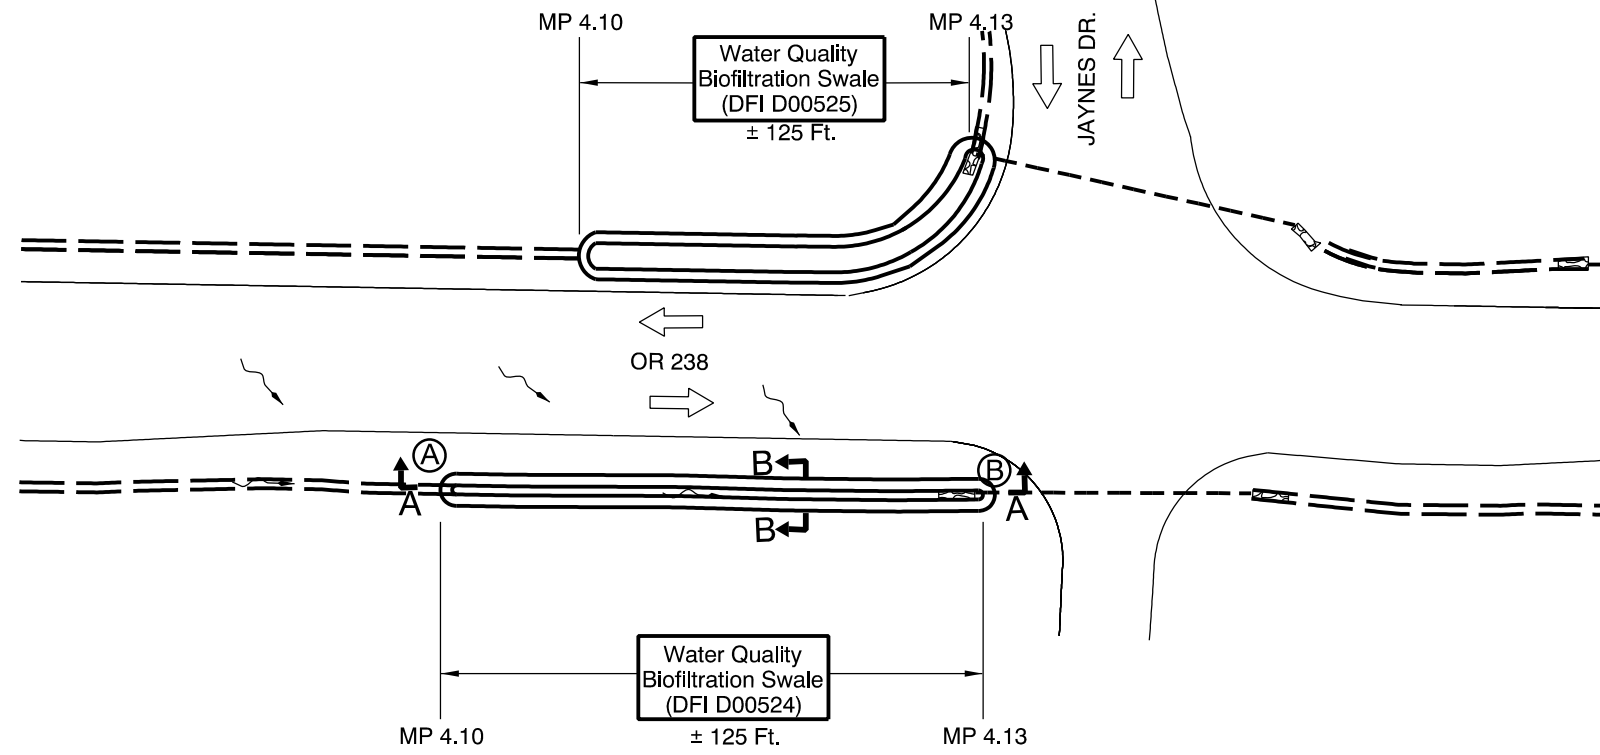

**SECTION B-B**  
N.T.S.

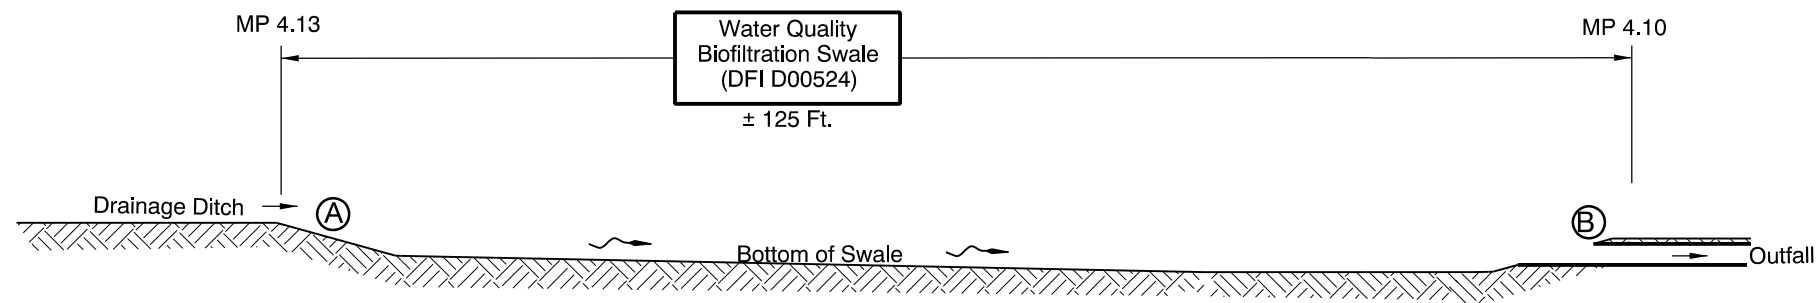

**SECTION A-A**  
N.T.S.

- LEGEND:**
- (A) Swale Inlet w/Flow Spreader Inlet
  - (B) Swale Outlet
  - (C) Flow Board Spreader
  - and ○ Manhole
  - and □
  - Storm Pipe (Facility)
  - Storm Pipe
  - ← Conveyance Direction
  - ~ Pavement / Facility Flow Path

OREGON DEPARTMENT OF TRANSPORTATION

Prepared By: T. BURRIER  
 Drafted By: T. BURRIER

**DFI D00524**  
**MAINTENANCE DISTRICT 8 HWY 272**  
**WQ BIOFILTRATION SWALE**  
 HIGHWAY MP 4.10 to MP 4.13  
 JOSEPHINE



# Appendix B

## Content:

- **ODOT Project Plan Sheets**
  - *Cover/Title Sheet*
  - *Water Quality/Detention Plan Sheets*
  - *Other Details*

STATE OF OREGON  
DEPARTMENT OF TRANSPORTATION


PLANS FOR PROPOSED PROJECT  
PAVING, GRADING, DRAINAGE & SIGNS

**OR 238 @ JAYNES DRIVE**

**JACKSONVILLE HIGHWAY**

**JOSEPHINE COUNTY**

**APRIL 2011**

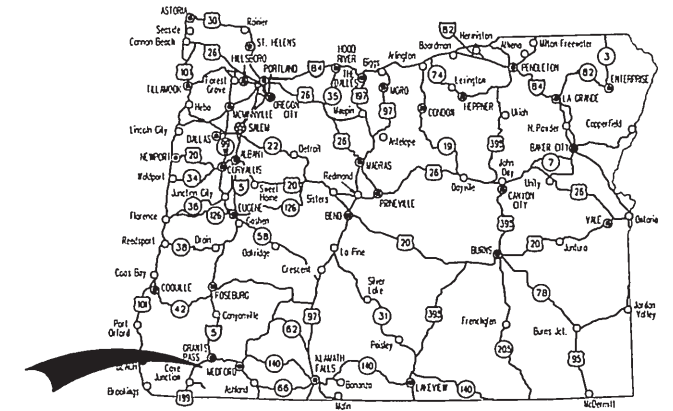

Overall Length Of Project - 0.8 Miles

**ATTENTION:**  
Oregon Law Requires You To Follow Rules Adopted By The Oregon Utility Notification Center. Those Rules Are Set Forth In OAR 952-001-0010 Through OAR 952-001-0090. You May Obtain Copies Of The Rules By Calling The Center. (Note: The Telephone Number For The Oregon Utility Center Is (503) 232-1987.)



**BEGINNING OF PROJECT**


**SO-NTSA-S272(029)**

**STA. "JH" 209+56.00 (M.P. 3.96)**

**END OF PROJECT**

**SO-NTSA-S272(029)**

**STA. "JH" 252+75.00 (M.P. 4.79)**

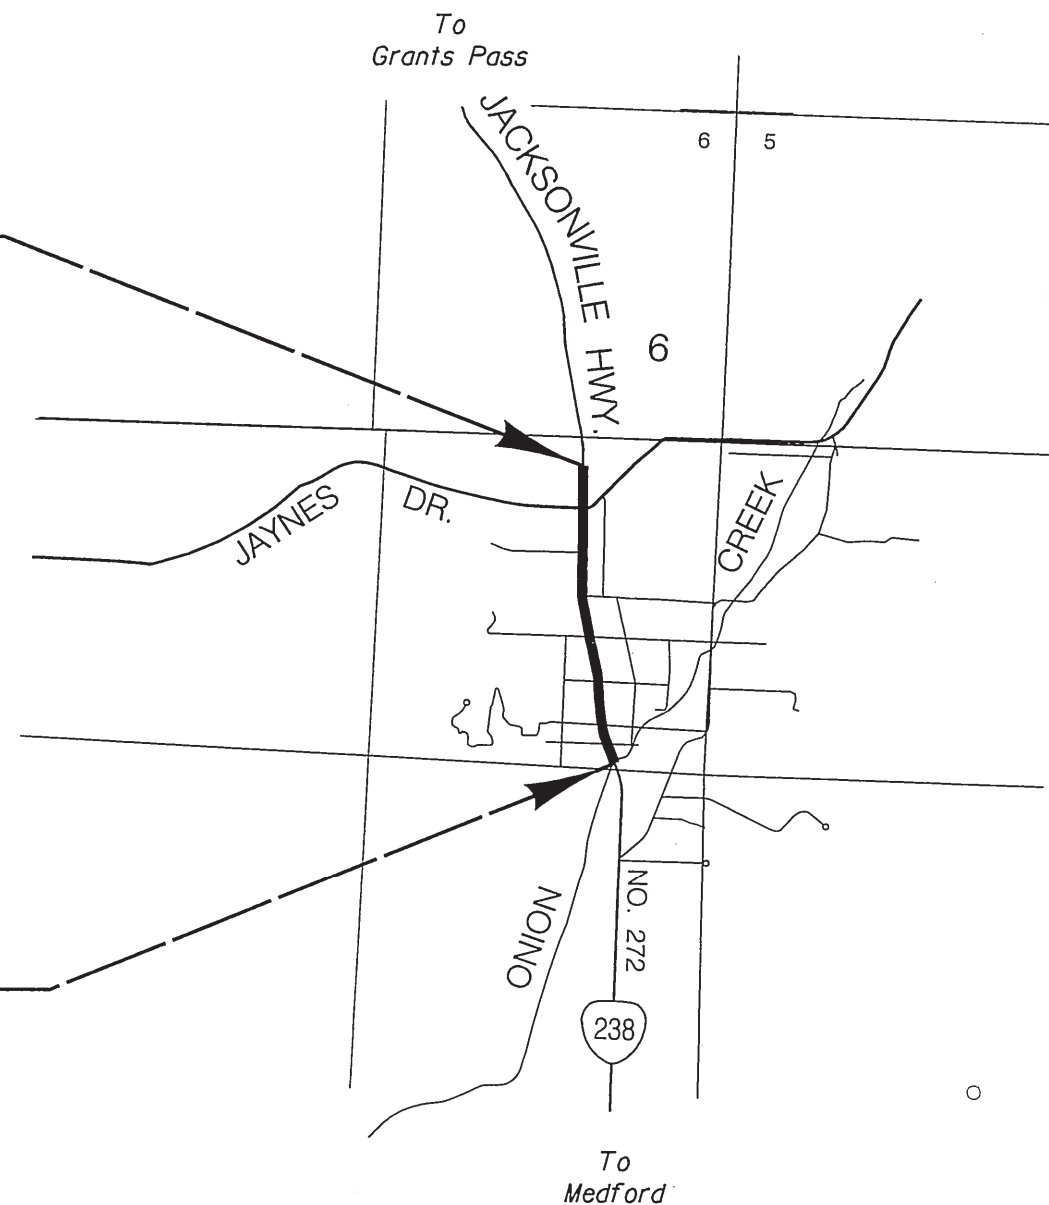

T. 37S., R. 5W., Sect. 07, W.M.



**OREGON TRANSPORTATION COMMISSION**

Gail Achterman	CHAIR
Michael Nelson	VICE-CHAIR
Mary F. Olson	COMMISSIONER
Alan Brown	COMMISSIONER
David Lohman	COMMISSIONER
Matthew L. Garrett	DIRECTOR OF TRANSPORTATION

These plans were developed using ODOT design standards. Exceptions to these standards, if any, have been submitted and approved by the ODOT Chief Engineer or their delegated authority.

Approving Authority:   
Signature & date **2-28-2011**

**MARK THOMPSON, TECH CENTER MGR**  
Print name and title

Concurrence by ODOT Chief Engineer

**OR 238 @ JAYNES DRIVE**  
JACKSONVILLE HIGHWAY  
JOSEPHINE COUNTY


FEDERAL HIGHWAY ADMINISTRATION	PROJECT NUMBER	SHEET NO.
OREGON DIVISION	SO-NTSA-S272(029)	1

Standard Dwg. Nos.

INDEX OF SHEETS, CONT'D.	
SHEET NO.	DESCRIPTION
2	Typical Sections
2B Thru 2B-7	Details
2D	Pipe Data
3 & 4	General Construction
5 Thru 8	Drainage & Utilities
9 & 10	Profiles
GA-1 Thru GA-4	Erosion Control
TRAFFIC PLANS	
ST1 & ST2	Striping Plan
S-12625 Thru S-12629	Sign Plan
16026	Signal Dwg., Flashing Beacon Plan
16027	Signal Dwg., Existing-Utilities

- |   |   |       |   |
|---|---|-------|---|
| RD100   | - Mailbox Support   | TM800 | - Tables, Abrupt Edge And PCMS Details  |
| RD101   | - Mailbox Installation  | TM810 | - Temporary Reflective Pavement Markers |
|   |   | TM821 | - Temporary Sign Supports               |
|   |   | TM850 | - 2-Lane, 2-Way Roadways                |
| RD300   | - Trench Backfill, Bedding, Pipe Zone And Mult. Installations   |       |   |
| RD302   | - Street Cut  |       |   |
| RD304   | - Arch Pipe Backfill/Compaction                                 |       |   |
| RD316   | - Sloped Ends For Metal Pipe                                    |       |   |
| RD318   | - Sloped Ends For Concrete Pipe                                 |       |   |
| RD320   | - Paved End Slope For Culverts 60" Maximum Pipe Size            |       |   |
| RD322, RD324                                    | - Safety End Section  |       |   |
| RD326   | - Coupling Bands For Corrugated Metal Pipe                      |       |   |
| RD336   | - Standard Storm Sewer Manhole                                  |       |   |
| RD346   | - Large Precast Manhole   |       |   |
| RD356   | - Manhole Covers and Frames                                     |       |   |
| RD380, RD382, RD384, RD386, RD388, RD390, RD391 | - Pipe Fill Height Tables                                       |       |   |
| RD610   | - Asphalt Pavement Details                                      |       |   |
| RD700   | - Curbs   |       |   |
| RD705   | - Islands   |       |   |
| RD710   | - Accessible Route Islands                                      |       |   |
| RD715   | - Approaches And Non-Sidewalk Driveways                         |       |   |
| RD1005  | - Check Dams  |       |   |
| RD1055  | - Matting   |       |   |
| TM200   | - Sign Installation Details                                     |       |   |
| TM201   | - Miscellaneous Sign Placement Details                          |       |   |
| TM206   | - Sign Bracing Details  |       |   |
| TM212   | - Signing Details Oregon Route Signs                            |       |   |
| TM221   | - Signing Details Milepost Markers                              |       |   |
| TM222   | - Installation Details Milepost Marker Posts                    |       |   |
| TM223   | - Conventional Roads Directional Sign Layout Street Name Signs  |       |   |
| TM230, TM233                                    | - Mounting Details For Removable Legend                         |       |   |
| TM500, TM501, TM502, TM503                      | - Pavement Marking Standard Details                             |       |   |
| TM515   | - Raised Pavement Markers                                       |       |   |
| TM523   | - Durable Pavement Markings                                     |       |   |
| TM539   | - Median And Left Turn Channelization Details                   |       |   |
| TM560   | - Alignment Layout  |       |   |
| TM570   | - Traffic Delineators   |       |   |
| TM571   | - Traffic Delineators Steel Post Details                        |       |   |
| TM576   | - Traffic Delineator Installation For Non-Freeways              |       |   |
| TM602   | - Triangular Base Breakaway Sign Support                        |       |   |
| TM635   | - Breakaway Sign and Luminaire Supports                         |       |   |
| TM670   | - Wood Post Sign Supports                                       |       |   |
| TM671   | - 3 Second Gust Wind Speed Isotach                              |       |   |
| TM676   | - Sign Attachments  |       |   |
| TM681   | - Perforated Steel Square Tube (PSST) Sign Support Installation |       |   |
| TM687   | - Perforated Steel Square Tube (PSST) Anchor Foundation         |       |   |
| TM688   | - Perforated Steel Square Tube (PSST) Slip Base Foundation      |       |   |

<b>OR 238 @ JAYNES DRIVE</b> JACKSONVILLE HIGHWAY JOSEPHINE COUNTY		
FEDERAL HIGHWAY ADMINISTRATION	PROJECT NUMBER	SHEET NO.
OREGON DIVISION	SO-NTSA-S272(029)	1A

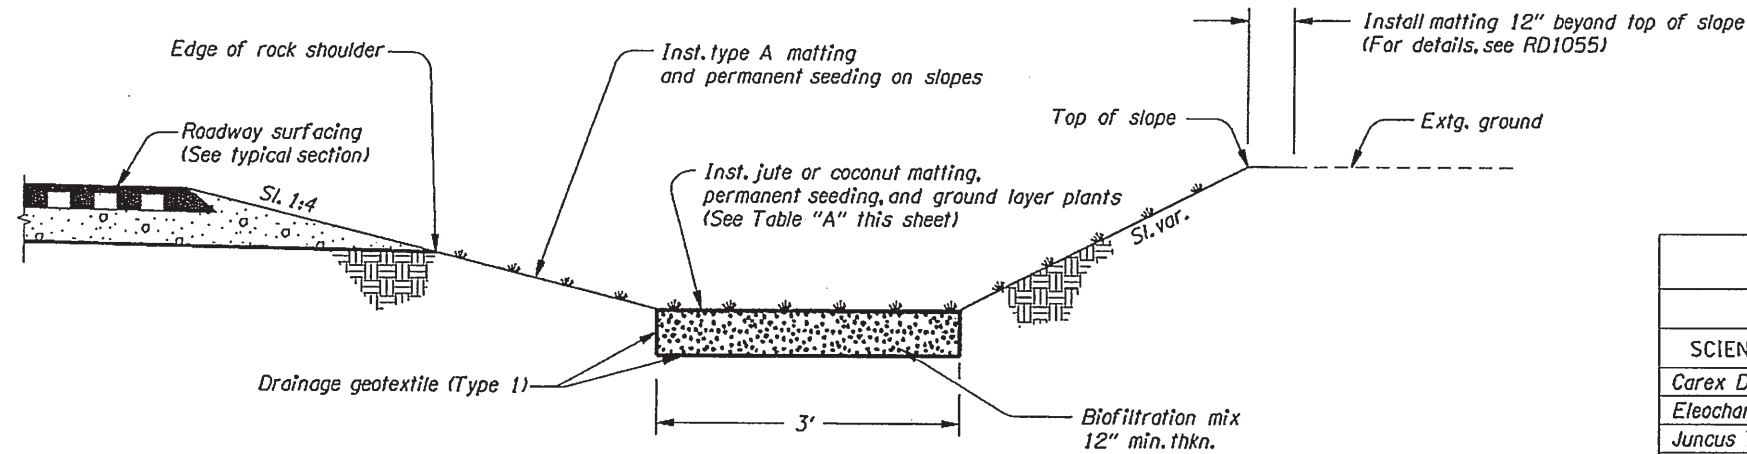


STA. "JH" 217+00.00 To STA. "JH" 218+27.00, Lt.  
 STA. "JH" 216+55.00 To STA. "JH" 217+80.00, Rt.

**BIOFILTRATION SWALE**  
 Not to scale

TABLE "A"			
ACCEPTABLE GROUND LAYER PLANTS			
SCIENTIFIC NAME	COMMON NAME	TYPE	QTY
<i>Carex Densa</i>	Dense Sedge	Plugs	378
<i>Eleocharis Palustris</i>	Common Spikebrush	Plugs	378
<i>Juncus Tenuis</i>	Proverty Rush	Plugs	378
<i>Mimulus Guttatus</i>	Seep Monkeyflower	Plugs	378
<b>TOTAL</b>			<b>1512</b>

**Note:**


1. Inst. permanent seeding over swale (ditch) soil surface from edge of rock shoulder to top of slope. Inst. flexible channel liner over seeding - per manufactures installation instructions. See Erosion Control Plans for other seeding areas.
2. Plant a mix of all four groundlayer plant species in each bioswale at a total density of 2 plants per square foot.
3. For details not shown, see std. dwg. no. RD1055

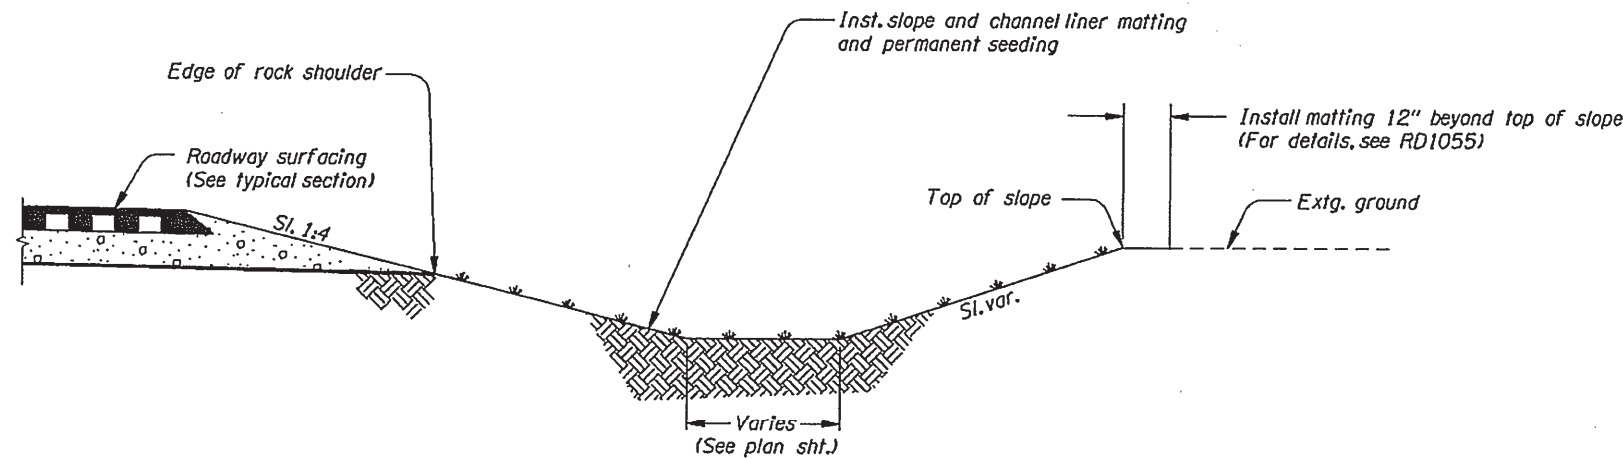

**TRAPEZOIDAL CHANNEL**  
 Not to scale


**Note:**

- Inst. type A matting on slopes and channel from Sta. "JH" 209+56, Rt. to Sta. "JH" 216+55, Rt. and from Sta. "JH" 209+56, Lt. to 217+00, Lt.
- Inst. type F flexible channel liner from Sta. "JH" 226+70, Rt. to Sta. "JH" 228+50, Rt.
- Inst. type E flexible channel liner in all other locations.
- For details not shown, see std. dwg. no. RD1055

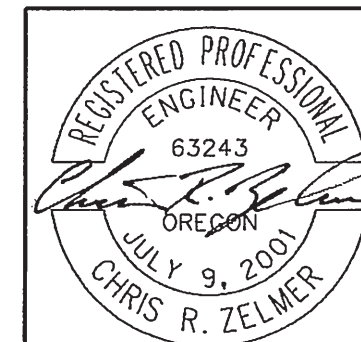


EXPIRES: JUNE 30, 2012


<b>OREGON DEPARTMENT OF TRANSPORTATION</b>	
<b>REGION 3 - TECHNICAL CENTER</b>	
<b>OR 238 @ JAYNES DRIVE</b> JACKSONVILLE HIGHWAY JOSEPHINE COUNTY	
Design Team Leader - Chris Zelmer Designed By - Chris Zelmer Drafted By - Judy Hardin	
<b>DETAILS</b>	SHEET NO. <b>2B-3</b>

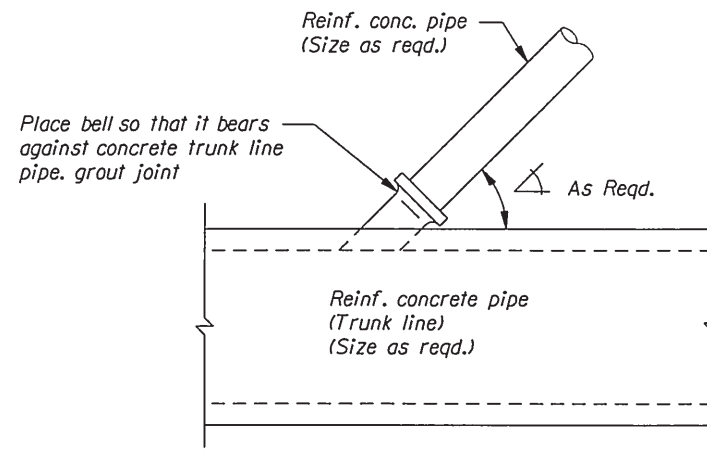

BLIND CONNECTION  
CONCRETE PIPE TO CONCRETE PIPE

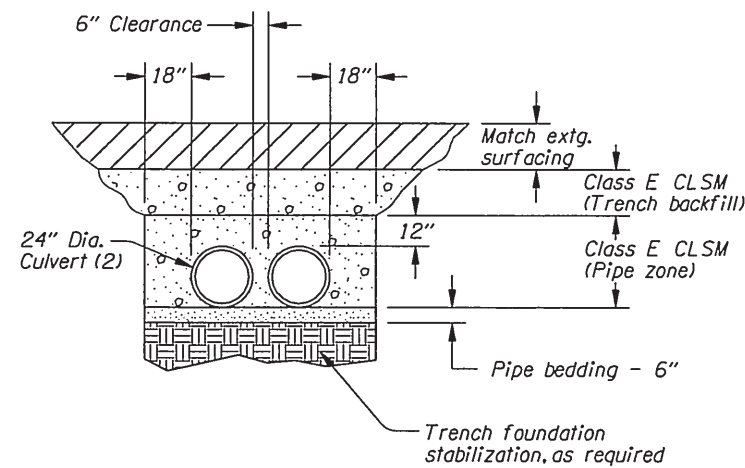


DOUBLE CULVERT INSTALLATION

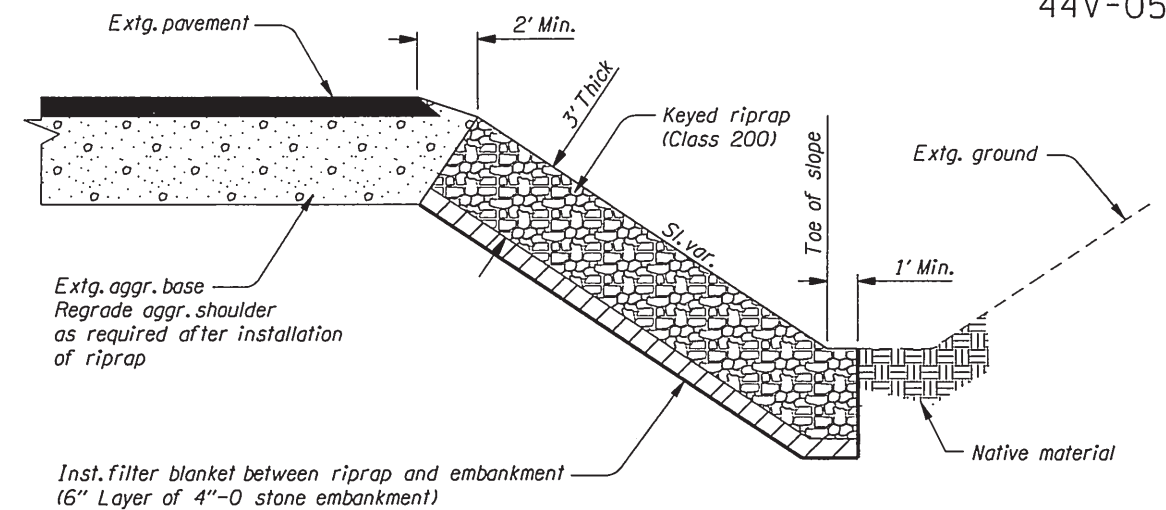

KEYED RIPRAP DETAIL


1/2" dia. hole typical  
3/8" dia. x 1 1/2" galvanized  
hex-head bolt with flat  
washers & nut

14 gauge aluminized steel  
saddle plate & pipe stub assembly  
with type "A" asphalt coating  
(Radius and corrugations as reqd.  
to match specific conditions)

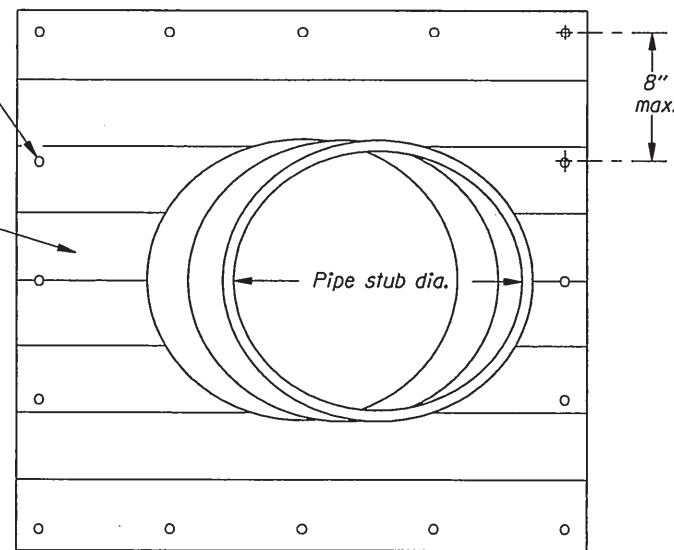

SIDE

Match pipe stub with the dia. of the connecting pipe.  
Angle pipe stub, as reqd., to match specific conditions

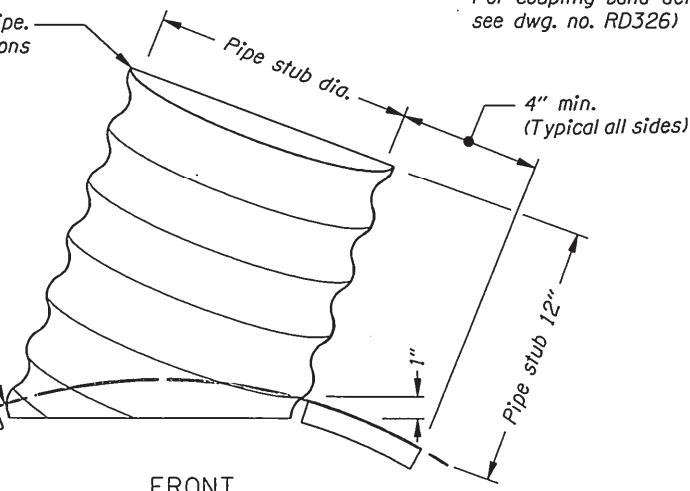


FRONT

14 gauge aluminized steel  
saddle plate & pipe stub assembly  
with type "A" asphalt coating  
(Radius and corrugations as reqd.  
to match specific conditions)

3/8" x 2" neoprene gasket  
or approved equal

CORRUGATED METAL PIPE SADDLE - T CONNECTION  
TO EXISTING CORRUGATED METAL PIPE

Note:  
For coupling band details,  
see dwg. no. RD326)

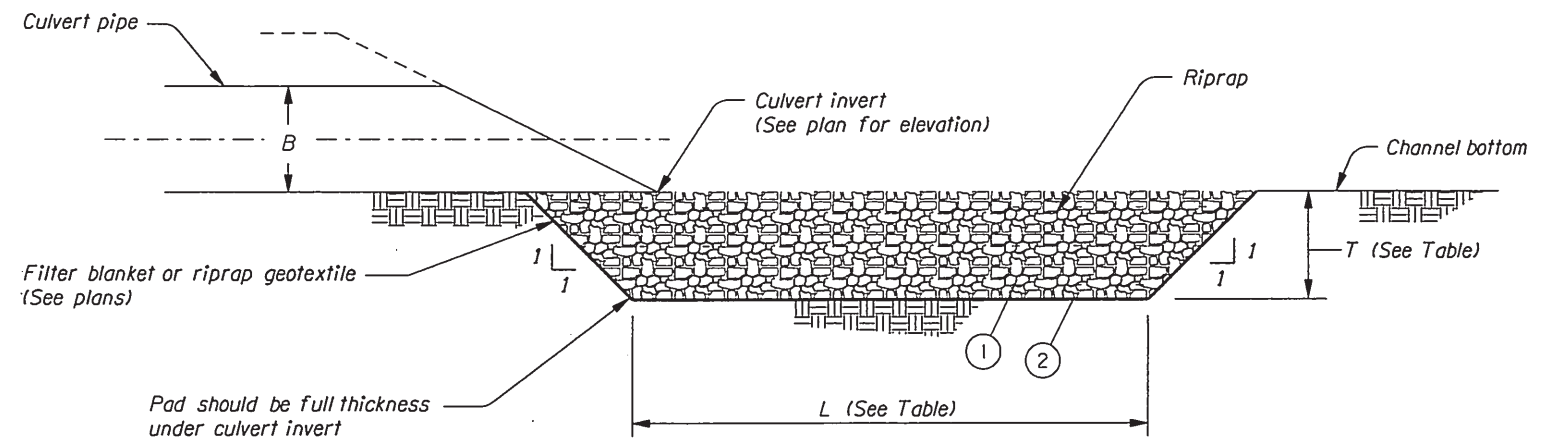

LOOSE RIPRAP PAD DETAIL


Notes:

- ① Do not excavate non-erodible rock in order to place riprap.
- ② Use filter blanket beneath Class 200 loose riprap.
- ③ Top width of the riprap pad to match width of swale bottom.

B = Diameter or span of conduit, ft.  
L = Length of bottom of riprap pad, ft.  
T = Thickness of riprap pad, ft.  
W = Width of top of riprap pad, ft.

TABLE		
Riprap Class	L* (ft)	T (ft)
50	4B or 1.3	2.3
100	4B or 1.6	3.3
200	4B or 2.0	4.3


\* L is the greater of 4B or the listed dimension

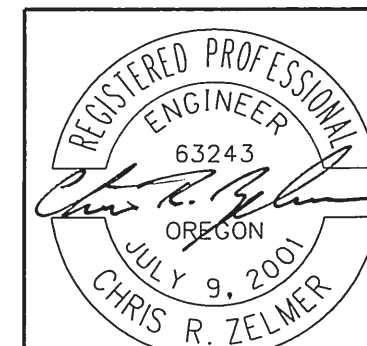


EXPIRES: JUNE 30, 2012

<p>OREGON DEPARTMENT OF TRANSPORTATION</p>	
<p>REGION 3 - TECHNICAL CENTER</p>	
<p>OR 238 @ JAYNES DRIVE JACKSONVILLE HIGHWAY JOSEPHINE COUNTY</p>	
<p>Design Team Leader - Chris Zelmer Designed By - Chris Zelmer Drafted By - Judy Hardin</p>	
<p><b>DETAILS</b></p>	<p>SHEET NO. 2B-4</p>




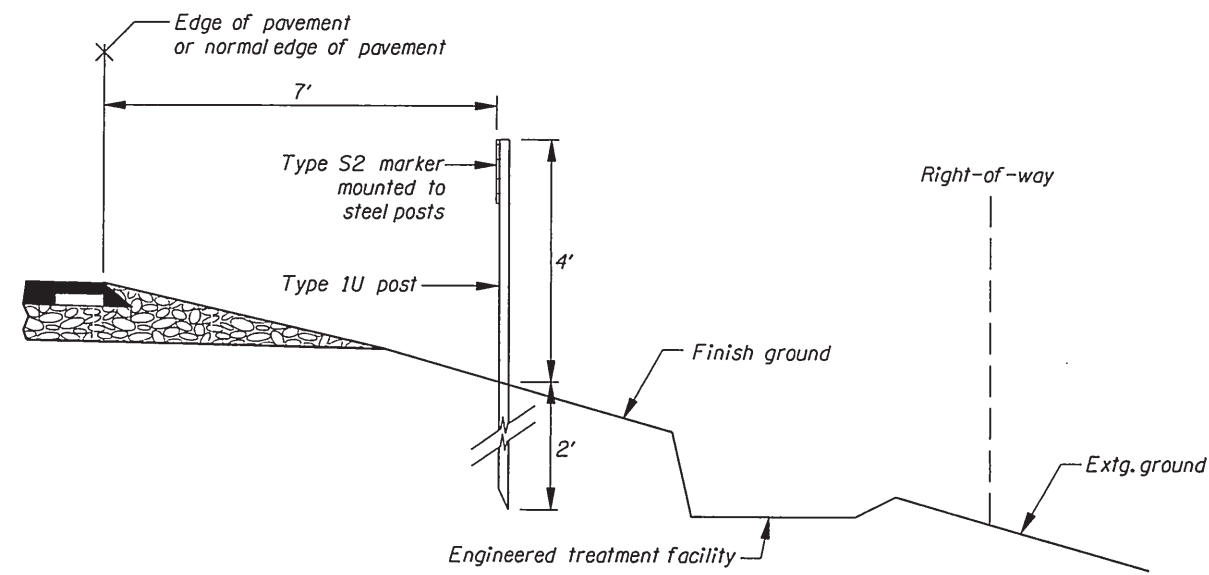

SECTION A-A

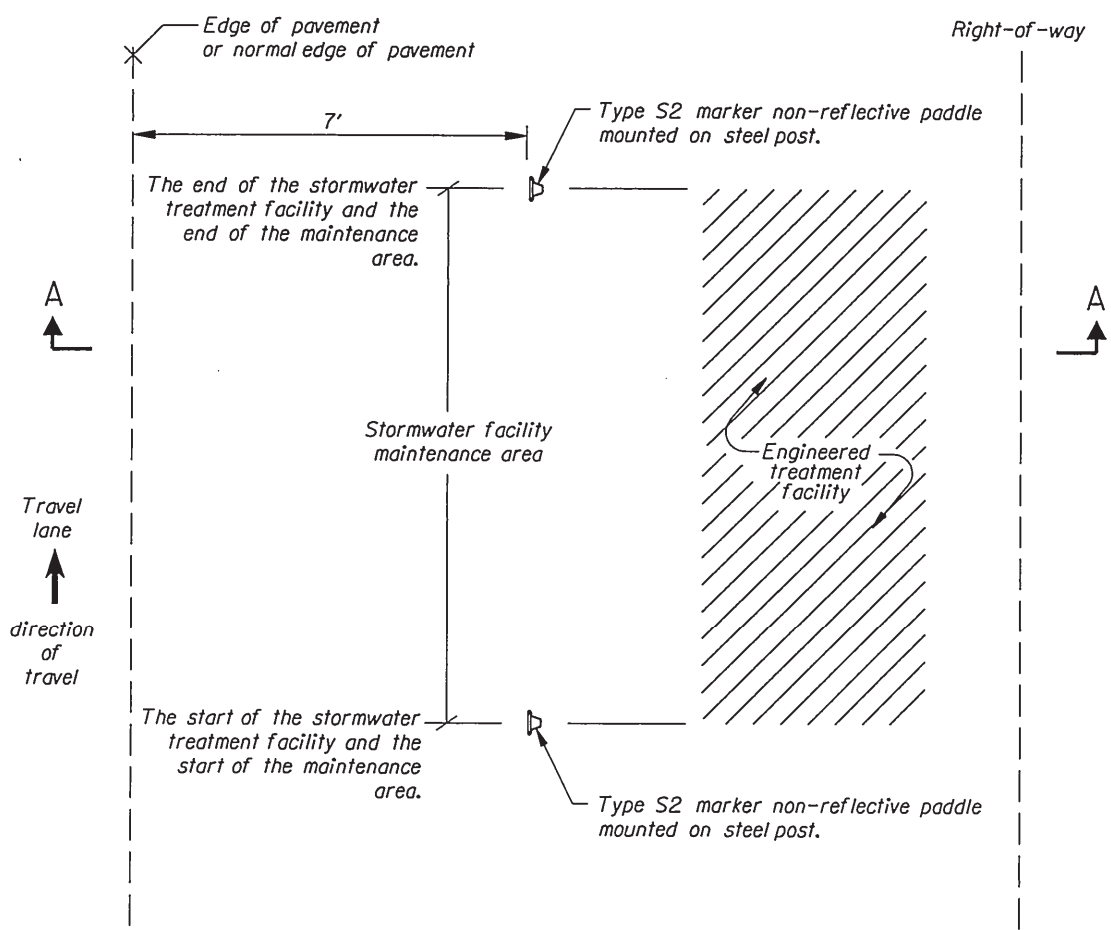

INSTALLATION DETAIL

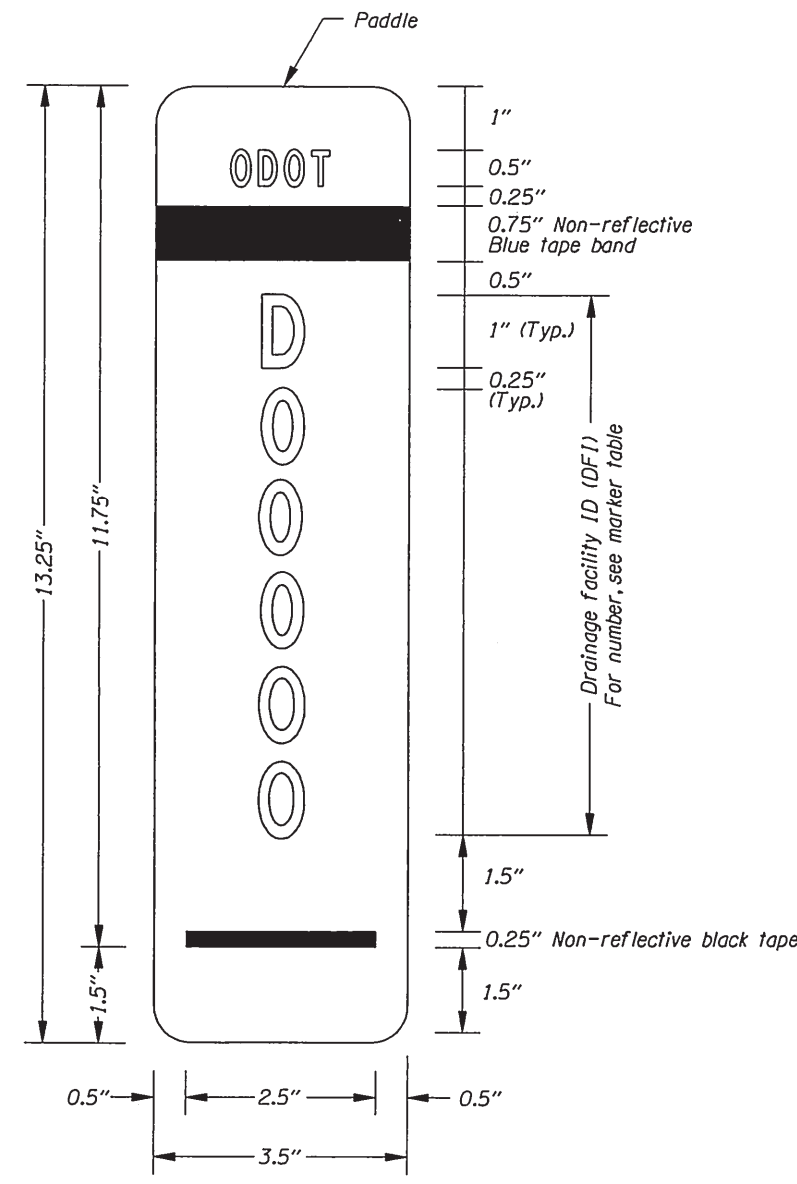


TYPE S2 MARKER  
(State supplied item)

MARKER TABLE

FACILITY LOCATION	DFI #	TYPE S2 MARKER	
		BEGIN	END
216+55, Rt.	D00524	✓	
217+80, Rt.	D00524		✓
217+00, Lt.	D00525	✓	
218+27, Lt.	D00525		✓

Notes:

- Paddle:**
  - Aluminum sheet, nominal thickness 0.050"
  - White non-reflective background
  - Mount paddle to one (1) type 1U steel post using 3/16" diameter aluminum blind rivets and washers.
  - Text and numbers are type C font in non-reflectORIZED black
  - Band is non-reflective blue tape
  - Do not mount paddle to other highway signing posts
  - Install paddle parallel to travel lane
  - Prepare paddle for each "DFI" noted in the marker table
- Steel Posts:**
  - See standard drawing TM571 for type 1U steel post dimensions
- Place 7 feet from edge of pavement or normal edge of pavement.
- See marker table for installation locations.

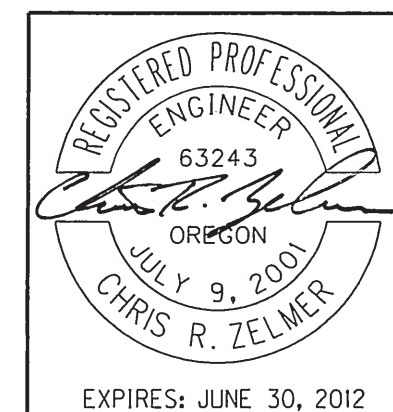

**OREGON DEPARTMENT OF TRANSPORTATION**

**REGION 3 - TECHNICAL CENTER**

**OR 238 @ JAYNES DRIVE**  
JACKSONVILLE HIGHWAY  
JOSEPHINE COUNTY


Design Team Leader - Chris Zelmer  
Designed By - Chris Zelmer  
Drafted By - Judy Hardin

**DETAILS**

SHEET NO. 2B-6

Sec. 07, T. 37 S, R. 5 W, W.M.

For notes, see shf. 5A

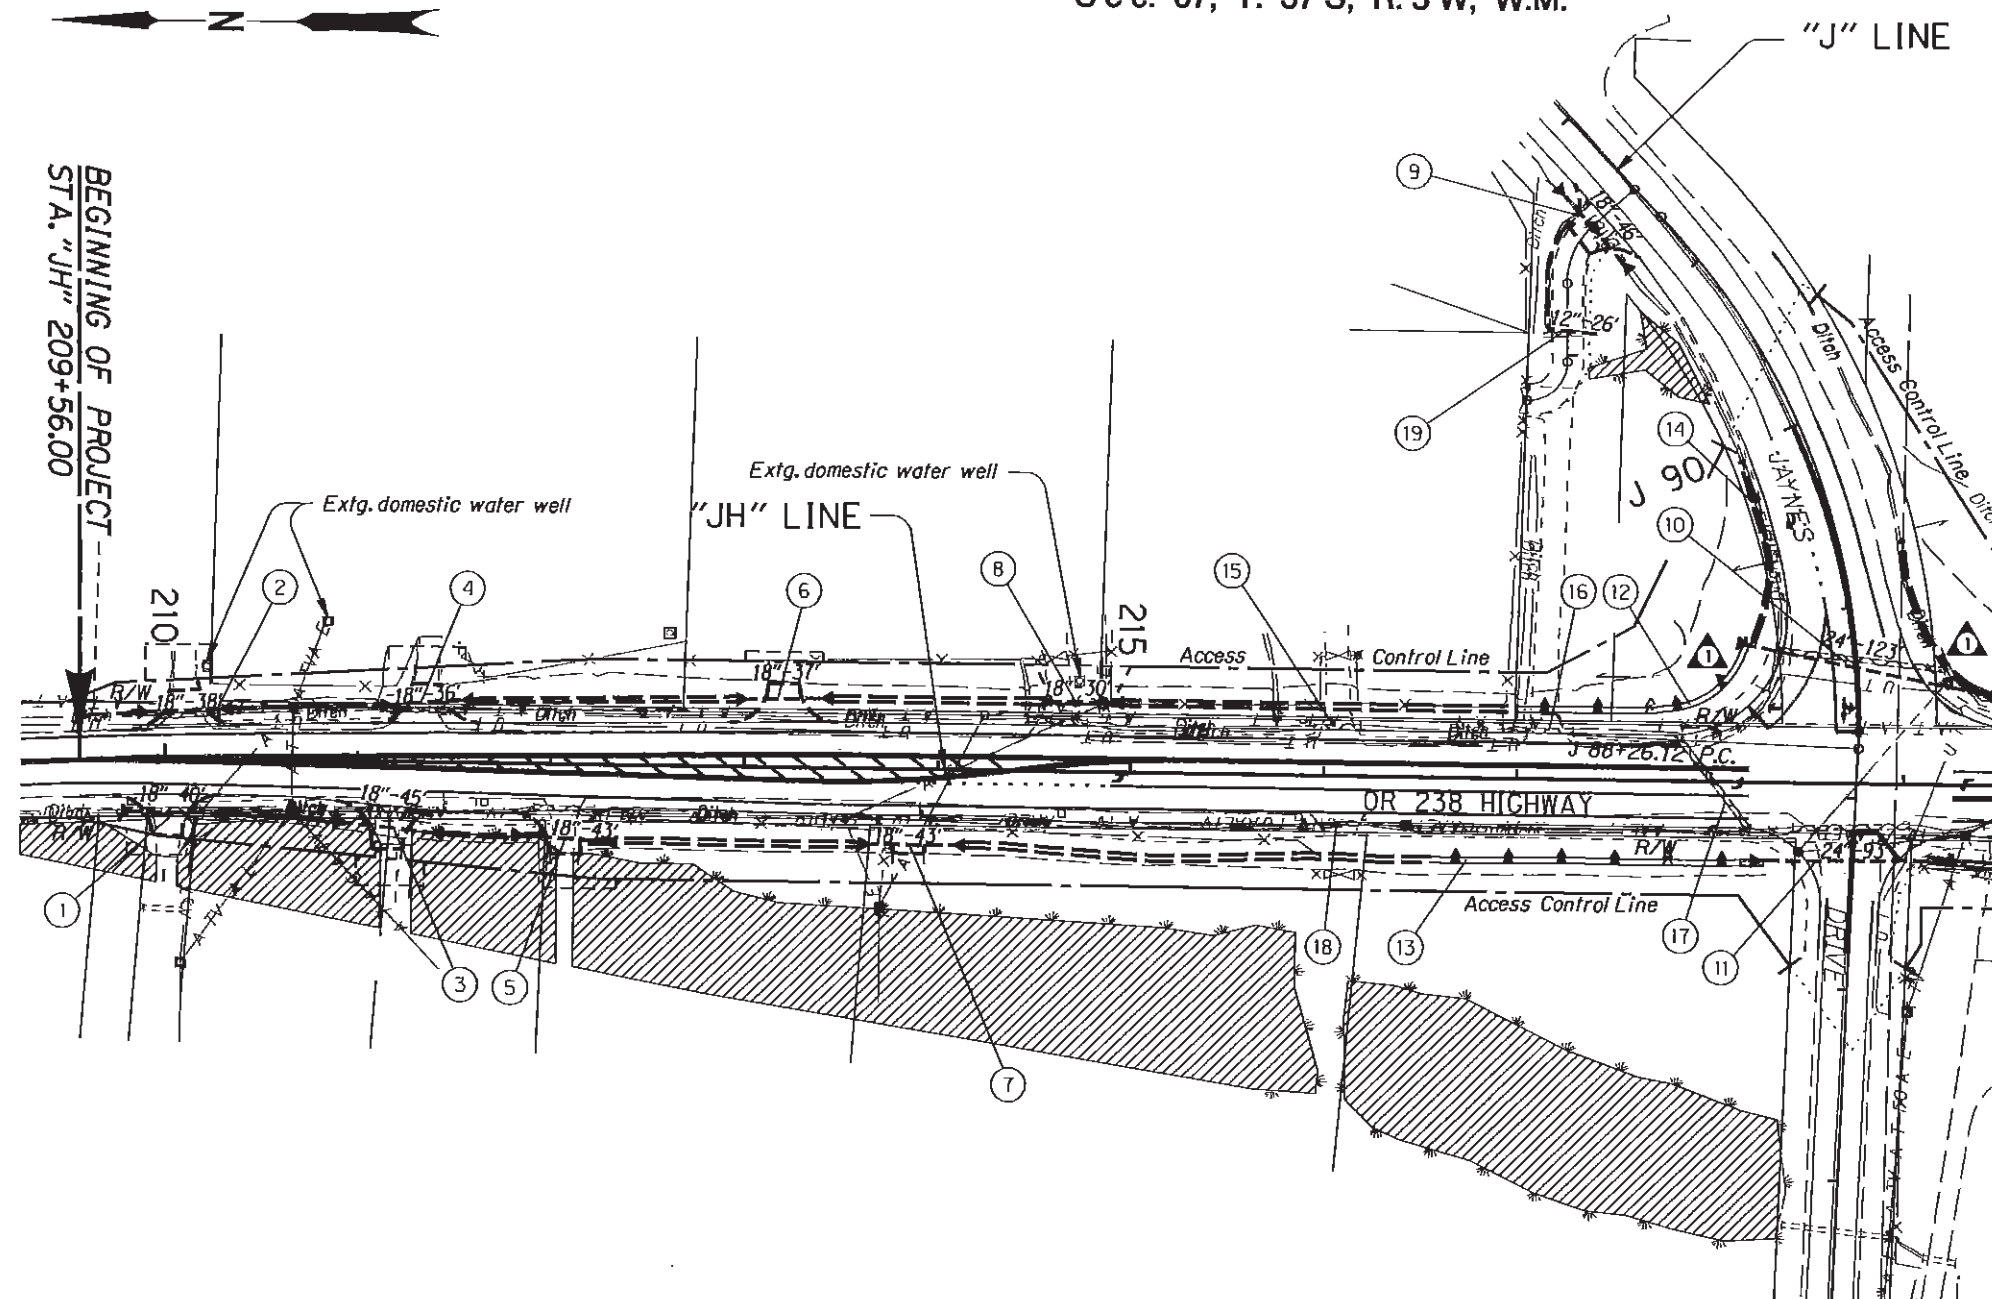

Notes:


1. Existing pipe removal is incidental to Section 00310 - Removal of Structures and Obstructions. No separate or additional payment will be made for pipe removal.
2. Safety end sections shall be 1:4 slope unless otherwise noted on plans.

No work zone shown thus:

Roadside ditch shown thus:   
(Incidental to general excavation)

Remove pipe or abandon in place shown thus:

No.	DATE	REVISIONS	BY
1	04-13-11	123' was 109', clarified swale	J.H.

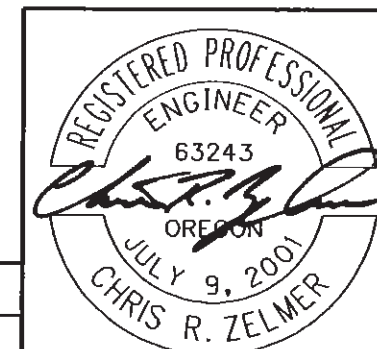

EXPIRES: JUNE 30, 2012

**OREGON DEPARTMENT OF TRANSPORTATION**

**REGION 3 - TECHNICAL CENTER**

**OR 238 @ JAYNES DRIVE**  
JACKSONVILLE HIGHWAY  
JOSEPHINE COUNTY

Design Team Leader - Chris Zelmer  
Designed By - Chris Zelmer  
Drafted By - Judy Hardin

**DRAINAGE & UTILITIES**

SHEET NO. **5**

① Sta. "JH" 209+85.50, 27.5' Rt. to Sta. "JH" 210+25.40, 28' Rt.  
Remove extg. culv. pipe - 30'  
Inst. 18" culv. pipe - 40'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
S = 0.0303'/ft.  
I.E. (Rt.) = 1274.46  
I.E. (Lt.) = 1273.25  
(See dwg. nos. RD300, RD316, RD318 & RD320)

② Sta. "JH" 209+92.00, 22.5' Lt. to Sta. "JH" 210+30.00, 26.5' Lt.  
Remove extg. culv. pipe - 33'  
Inst. 18" culv. pipe - 38'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
S = 0.0295'/ft.  
I.E. (Lt.) = 1276.37  
I.E. (Rt.) = 1275.25

③ Sta. "JH" 210+94.3, 33' Rt. to Sta. "JH" 211+39.30, 37.1' Rt.  
Remove extg. culv. pipe - 21'  
Inst. 18" culv. pipe - 45'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
S = 0.0296'/ft.  
I.E. (Rt.) = 1270.58  
I.E. (Lt.) = 1269.25

④ Sta. "JH" 211+17.90, 29.6' Lt. to Sta. "JH" 211+54.00, 32.5' Lt.  
Remove extg. culv. pipe - 36'  
Inst. 18" culv. pipe - 36'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
S = 0.0417'/ft.  
I.E. (Lt.) = 1272.60  
I.E. (Rt.) = 1271.10

⑤ Sta. "JH" 211+86.60, 37.3' Rt. to Sta. "JH" 212+29.30, 39.3' Rt.  
Remove extg. culv. pipe - 31'  
Inst. 18" culv. pipe - 43'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
S = 0.0209'/ft.  
I.E. (Rt.) = 1267.50  
I.E. (Lt.) = 1266.60

⑥ Sta. "JH" 213+02.00, 35.4' Lt. to Sta. "JH" 213+39.00, 36.2' Lt.  
Inst. 18" culv. pipe - 37'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
S = 0.0189'/ft.  
I.E. (Lt.) = 1265.67  
I.E. (Rt.) = 1264.97

⑦ Sta. "JH" 213+66.00, 39.4' Rt. to Sta. "JH" 214+08.50, 39.4' Rt.  
Inst. 18" culv. pipe - 43'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
S = 0.0256'/ft.  
I.E. (Rt.) = 1263.00  
I.E. (Lt.) = 1261.90  
(See dwg. nos. RD316 & RD326)

⑧ Sta. "JH" 214+60.00, 36.3' Lt. to Sta. "JH" 214+90.00, 36.3' Lt.  
Remove extg. culv. pipe - 31'  
Inst. 18" culv. pipe - 30'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
S = 0.0220'/ft.  
I.E. (Lt.) = 1261.68  
I.E. (Rt.) = 1261.02

⑨ Sta. "J" 91+25.43, 30.5' Lt. to Sta. "J" 91+71.75, 29.0' Lt.  
Inst. 18" culv. pipe - 46'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
S = 0.0543'/ft.  
I.E. (Rt.) = 1261.90  
I.E. (Lt.) = 1259.40  
(See dwg. no. RD390)

⑩ Sta. "JH" 218+18.82, 71.6' Lt. to Sta. "JH" 219+40.40, 48.2' Lt.  
Remove extg. culv. pipe - 87'  
Inst. 24" culv. pipe - 123'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
Const. loose riprap (Class 100) - 7 cu. yd.  
Riprap geotextile - 6 sq. yd.  
Trench resurfacing - 78 sq. yd.  
Class E backfill  
S = 0.0049'/ft.  
I.E. (Lt.) = 1250.60  
I.E. (Rt.) = 1250.00  
(For details, see sht. 2B-4)

⑪ Sta. "JH" 218+27.00, 42.5' Rt. to Sta. "JH" 219+20.00, 39.5' Rt.  
Remove extg. culv. pipe - 60'  
Inst. 24" culv. pipe - 93'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
Const. loose riprap (Class 100) - 7 cu. yd.  
Riprap geotextile - 6 sq. yd.  
Trench resurfacing - 75 sq. yd.  
Class E backfill  
S = 0.0151'/ft.  
I.E. (Rt.) = 1252.90  
I.E. (Lt.) = 1251.50  
(For details, see sht. 2B-4)

⑫ Sta. "JH" 217+00.00 to Sta. "JH" 218+27.00, Lt.  
Const. biofiltration swale - 140'  
Install level spreader - 3  
(For details, see shts. 2B-2 & 2B-3)

⑬ Sta. "JH" 216+55.00 to Sta. "JH" 217+80.00, Rt.  
Const. biofiltration swale - 125'  
Install level spreader - 3  
(For details, see shts. 2B-2 & 2B-3)

⑭ Sta. "J" 89+29.00 to Sta. "J" 89+94.00, Lt.  
Ditch excavation - 60 cu. yd.

⑮ Sta. "JH" 215+94.6, Lt. to Sta. "JH" 216+18.7, Lt.  
Remove extg. culv. pipe - 24'


⑯ Sta. "JH" 217+04.0, Lt. to Sta. "JH" 217+28.5, Lt.  
Remove extg. culv. pipe - 24'

⑰ Sta. "JH" 217+84.0, 29' Lt. to Sta. "JH" 218+19.25, 24' Rt.  
Remove extg. culv. pipe - 58'  
Trench resurfacing - 30 sq. yd.  
Class E backfill

⑱ Sta. "JH" 215+91.37, Rt. to Sta. "JH" 216+22.05, Rt.  
Remove extg. culv. pipe - 31'

⑲ Sta. "F" 20+86.00, 10.3' Rt. to Sta. "F" 20+89.30, 15.4' Lt.  
Inst. 12" culv. pipe - 26'  
5' depth  
S = 0.0462'/ft.  
I.E. (Rt.) = 1260.40  
I.E. (Lt.) = 1259.20

No.	DATE	REVISIONS	BY
⑩	04-13-11	Revised notes 10 and 14.	J.H.

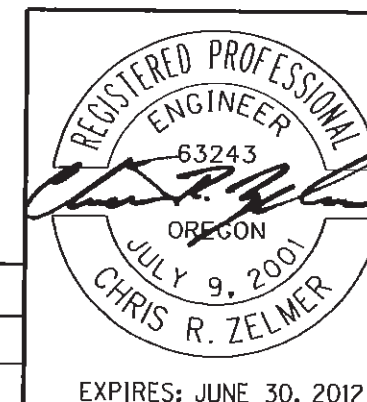

**OREGON DEPARTMENT OF TRANSPORTATION**

**REGION 3 - TECHNICAL CENTER**

OR 238 @ JAYNES DRIVE  
JACKSONVILLE HIGHWAY  
JOSEPHINE COUNTY

Design Team Leader - Chris Zelmer  
Designed By - Chris Zelmer  
Drafted By - Judy Hardin


**DRAINAGE & UTILITIES**

SHEET NO. 5A



Sec. 07, T. 37 S, R. 5 W, W.M.

For notes, see sht. 6A

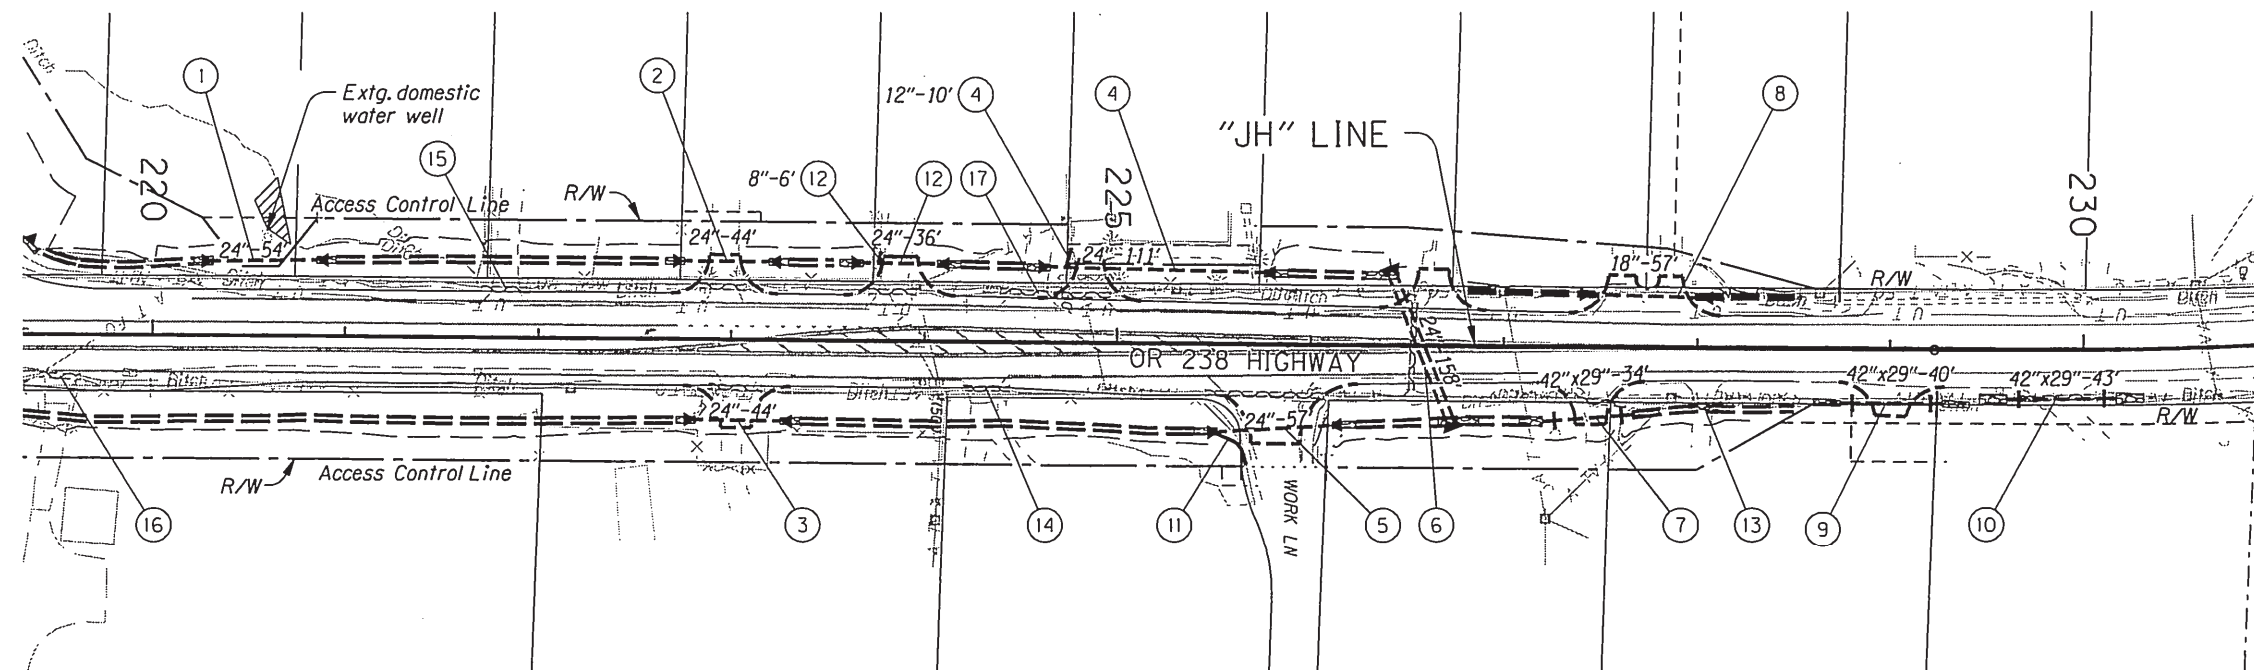

Notes:

- Existing pipe removal is incidental to Section 00310 - Removal of Structures and Obstructions. No separate or additional payment will be made for pipe removal.
- Safety end sections shall be 1:4 slope unless otherwise noted on plans.

 OREGON DEPARTMENT OF TRANSPORTATION


 REGION 3 - TECHNICAL CENTER


OR 238 @ JAYNES DRIVE  
JACKSONVILLE HIGHWAY  
JOSEPHINE COUNTY


Design Team Leader - Chris Zelmer  
Designed By - Chris Zelmer  
Drafted By - Judy Hardin


**DRAINAGE & UTILITIES**

SHEET NO. 6

No work zone shown thus: 

Roadside ditch shown thus:   
(Incidental to general excavation)

Remove extg. culvert shown thus: 

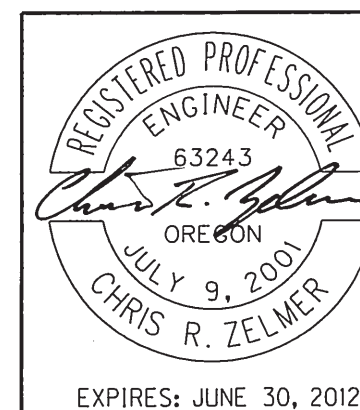

① Sta. "JH" 220+32.0, 40.3' Lt. to Sta. "JH" 220+86.0, 41.1' Lt.  
Inst. 24" culv. pipe - 54'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
Const. loose riprap (Class 100) - 6 cu. yd.  
Riprap geotextile - 6 sq. yd.  
S = 0.0352'/ft.  
I.E. (Lt.) = 1248.25  
I.E. (Rt.) = 1246.35  
(For details, see sht. 2B-4)

② Sta. "JH" 222+75.5, 40' Lt. to Sta. "JH" 223+19.5, 40' Lt.  
Remove extg. culv. pipe - 24'  
Inst. 24" culv. pipe - 44'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
Const. loose riprap (Class 100) - 6 cu. yd.  
Riprap geotextile - 6 sq. yd.  
S = 0.0170'/ft.  
I.E. (Lt.) = 1240.00  
I.E. (Rt.) = 1239.25  
(For details, see sht. 2B-4)

③ Sta. "JH" 222+81.75, 41.8' Rt. to Sta. "JH" 223+25.86, 42' Rt.  
Remove extg. culv. pipe - 27'  
Inst. 24" culv. pipe - 44'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
Const. loose riprap (Class 100) - 6 cu. yd.  
Riprap geotextile - 6 sq. yd.  
S = 0.0191'/ft.  
I.E. (Rt.) = 1239.08  
I.E. (Lt.) = 1238.24  
(For details, see sht. 2B-4)

④ Sta. "JH" 224+64.70, 39.8' Lt. to Sta. "JH" 225+76.00, Lt.  
Remove extg. culv. pipe - 25'  
Inst. 12" culv. pipe - 10'  
5' depth  
Connect extg. storm sew. pipe  
Inst. 24" culv. pipe - 111'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
Inst. 12" WYE Fitting  
Const. loose riprap (Class 100) - 6 cu. yd.  
Riprap geotextile - 6 sq. yd.  
S = 0.0234'/ft.  
I.E. (24" Lt.) = 1236.00  
I.E. (24" Rt.) = 1233.40  
I.E. (12" In) = 1237.75  
(For details, see sht. 2B-4)

⑤ Sta. "JH" 225+53.0, 41.7' Rt. to Sta. "JH" 226+10.0, 40.8' Rt.  
Remove extg. culv. pipe - 60'  
Inst. 24" culv. pipe - 57'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
Const. loose riprap (Class 100) - 6 cu. yd.  
Riprap geotextile - 6 sq. yd.  
Class E backfill  
S = 0.0307'/ft.  
I.E. (Rt.) = 1232.60  
I.E. (Lt.) = 1230.85  
(For details, see sht. 2B-4)

⑥ Sta. "JH" 226+39.5, 37.5' Lt. to Sta. "JH" 226+70.0, 39' Rt.  
Remove extg. culv. pipe - 46'  
Inst. 24" culv. pipe - 158'  
5' depth (Double barrel)  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
Const. loose riprap (Class 100) - 15 cu. yd.  
Riprap geotextile - 14 sq. yd.  
Trench resurfacing - 32 sq. yd.  
Class E backfill  
S = 0.0266'/ft.  
I.E. (Lt.) = 1231.40  
I.E. (Rt.) = 1229.30  
(For details, see sht. 2B-4)  
(See dwg. no. RD320)

⑦ Sta. "JH" 227+20.0, 38.5' Rt. to Sta. "JH" 227+67.5, 34.5' Rt.  
Remove extg. culv. pipe - 25'  
Inst. 42"x29" arch culv. pipe - 34'  
5' depth  
Inst. safety end section - 2  
Const. loose riprap (Class 200) - 15 cu. yd.  
Filter blanket - 11 sq. yd.  
S = 0.0337'/ft.  
I.E. (Rt.) = 1227.70  
I.E. (Lt.) = 1226.20  
(For details, see sht. 2B-4)  
(See dwg. nos. RD304 & RD322)

⑧ Sta. "JH" 227+46.0, 28' Lt. to Sta. "JH" 228+02.0, 26' Lt.  
Inst. 18" culv. pipe - 57'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
S = 0.0263'/ft.  
I.E. (Lt.) = 1229.10  
I.E. (Rt.) = 1227.60

⑨ Sta. "JH" 228+74.0, 28.0' Rt. to Sta. "JH" 229+27.3, 28.0' Rt.  
Inst. 42"x29" arch culv. pipe - 40'  
5' depth  
Inst. safety end section - 2  
Const. loose riprap (Class 200) - 15 cu. yd.  
Filter blanket - 11 sq. yd.  
S = 0.0093'/ft.  
I.E. (Rt.) = 1223.70  
I.E. (Lt.) = 1223.33  
(For details, see sht. 2B-4)

⑩ Sta. "JH" 229+64.4, 25' Rt. to Sta. "JH" 230+12.2, 25' Rt.  
Remove extg. culv. pipe - 40'  
Inst. 42"x29" arch culv. pipe - 43'  
5' depth  
Inst. safety end section - 2  
Const. loose riprap (Class 200) - 15 cu. yd.  
Filter blanket - 11 sq. yd.  
Trench resurfacing - 27 sq. yd.  
S = 0.0600'/ft.  
I.E. (Rt.) = 1221.56  
I.E. (Lt.) = 1218.98  
(For details, see sht. 2B-4)

⑪ Regrade extg. ditch.  
Grade to drain as directed by engineer

⑫ Sta. "JH" 223+68.00, 40' Lt. to Sta. "JH" 224+04.00, 40.5' Lt.  
Remove extg. culv. pipe - 24'  
Inst. 8" culv. pipe - 6'  
5' depth  
Inst. 24" culv. pipe - 36'  
5' depth  
Const. sloped end section - 2  
Const. paved end slope, Lt. & Rt.  
Const. loose riprap (Class 100) - 6 cu. yd.  
Riprap geotextile - 6 sq. yd.  
Inst. 8" WYE Fitting  
S = 0.0222'/ft.  
I.E. (24" Lt.) = 1238.20  
I.E. (24" Rt.) = 1237.40  
I.E. (8" In) = 1239.30  
(For details, see sht. 2B-4)

⑬ Sta. "JH" 227+95.6, Rt. to Sta. "JH" 228+11.6, Rt.  
Remove extg. culv. pipe - 16'


⑭ Sta. "JH" 224+20.0, Rt. to Sta. "JH" 224+44.0, Rt.  
Remove extg. culv. pipe - 24'

⑮ Sta. "JH" 221+70.5, Lt. to Sta. "JH" 221+95.7, Lt.  
Remove extg. culv. pipe - 25'

⑯ Sta. "JH" 219+41.6, Rt. to Sta. "JH" 219+62.8, Rt.  
Remove extg. culv. pipe - 21'

⑰ Sta. "JH" 224+38.79, Lt. to Sta. "JH" 224+68.75, Lt.  
Remove extg. culv. pipe - 30'

No.	DATE	REVISIONS	BY
①	04-13-11	Revised notes 1 and 6.	J.H.

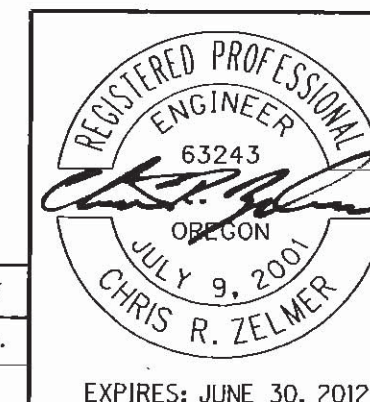

**OREGON DEPARTMENT OF TRANSPORTATION**

**REGION 3 - TECHNICAL CENTER**

**OR 238 @ JAYNES DRIVE**  
JACKSONVILLE HIGHWAY  
JOSEPHINE COUNTY

Design Team Leader - Chris Zelmer  
Designed By - Chris Zelmer  
Drafted By - Judy Hardin

**DRAINAGE & UTILITIES**

SHEET NO. **6A**