

# OPERATION & MAINTENANCE MANUAL

## Water Quality Biofiltration Swale

Manual prepared: December 2019

DFI No. **D01208**



Figure 1: DFI No. D01208, looking North (Placeholder for future photo)

## Identification

Drainage Facility ID (DFI): D01208  
Facility Type: Water Quality Biofiltration Swale  
Construction Drawings: (V-File Numbers) 52V-27  
Location: District: 05  
Highway No.: ROW not yet acquired by ODOT – Hwy No. & MP unknown  
Mile Post: Left Side from Goodpasture Island Road On-Ramp

### 1. Manual Purpose

The purpose of this manual is to outline inspection needs and summarize maintenance actions.

### 2. Facility Location

The location map below details the facility location. The highway, mile posts, side streets, access location, and stormwater flow directions are noted on the map.

Facility location type: Interchange

Flow direction: North

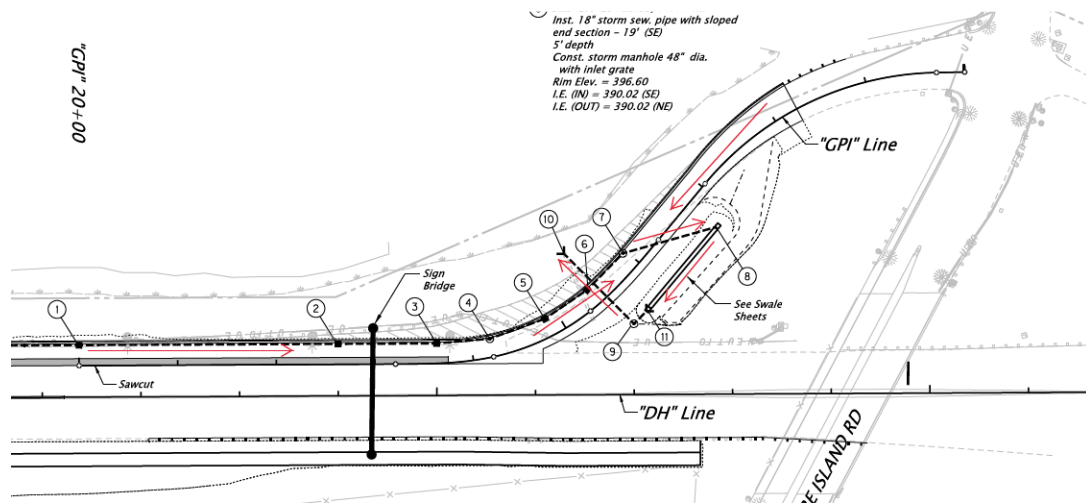



Figure 2: Facility location map (Placeholder)

### 3. Facility Summary

The length and width of a swale is based on the bottom dimensions.

The bottom length and bottom width of the swale is:


Bottom Length (feet)	Bottom Width (feet)
115	4.0

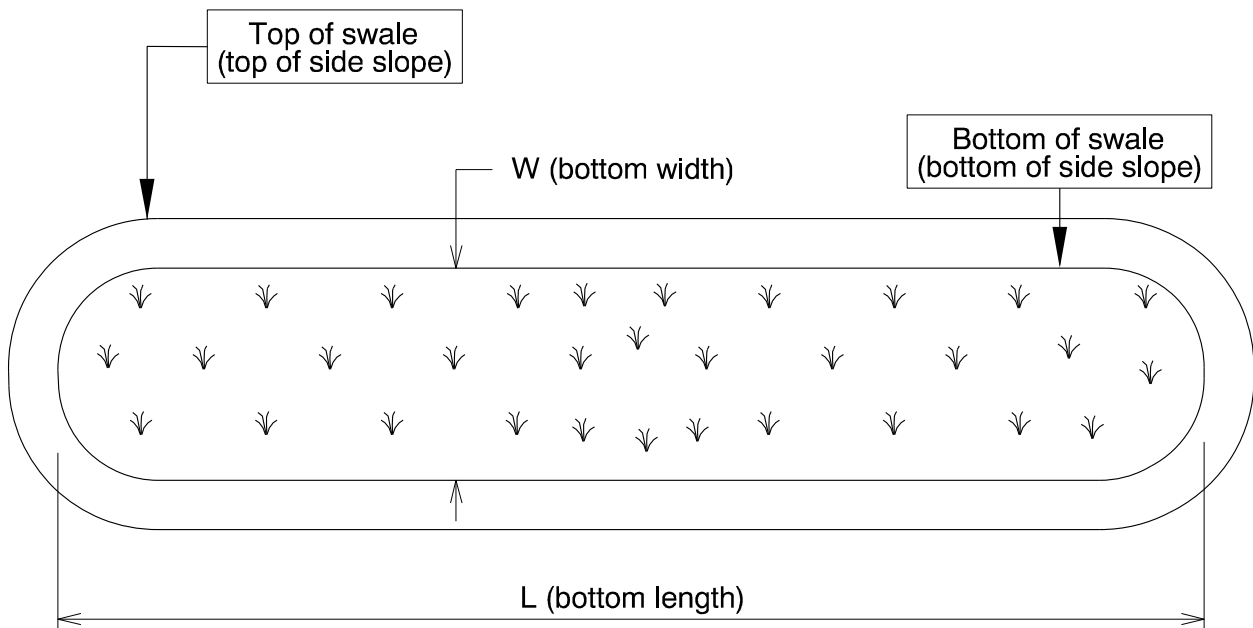

The depth of the swale is the vertical distance measured from the bottom of the swale to the top. The slope of the swale sides is presented by a vertical distance (rise) followed by the horizontal distance (run).

Depth and side slopes:

Depth (feet)	Rise (feet)	Run (feet)
3	3	12

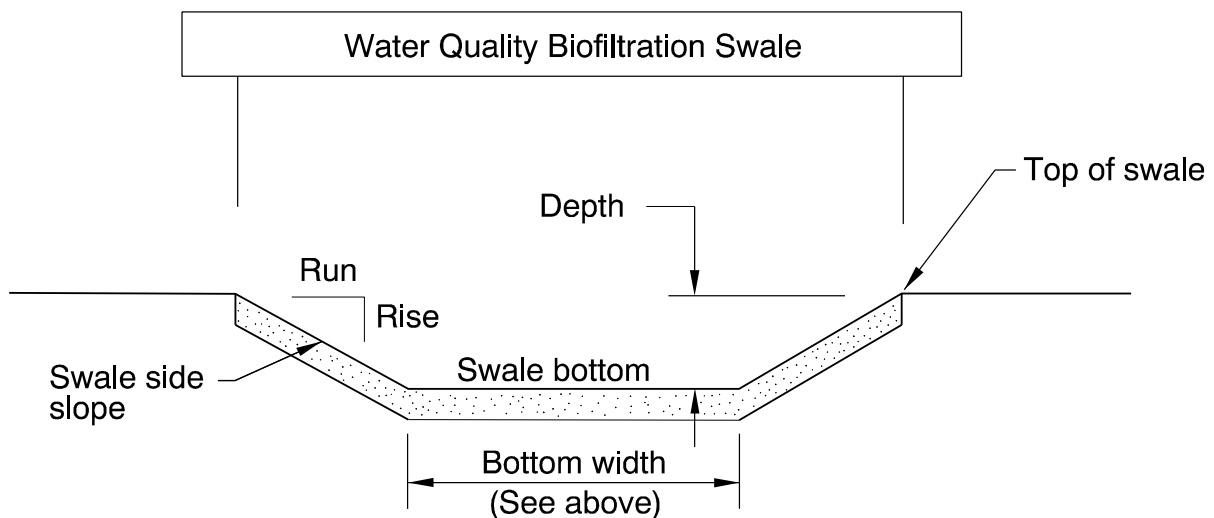

**Site Specific Information:**

Access this facility from the Delta Highway On-Ramp Ramp from Goodpasture Island Road; there are two bollards and a gate at the entrance to the maintenance road. The facility is a bioswale with riprap lined inlet and outlet basins. The outlet basin discharges through an enclosed pipe system under the on-ramp to the pond complex.

## 4. Facility Access

Maintenance access to the facility:

<input type="checkbox"/> Roadside pad	<input type="checkbox"/> Roadside shoulder
<input checked="" type="checkbox"/> Access road with Gate	<input type="checkbox"/> Access road without Gate

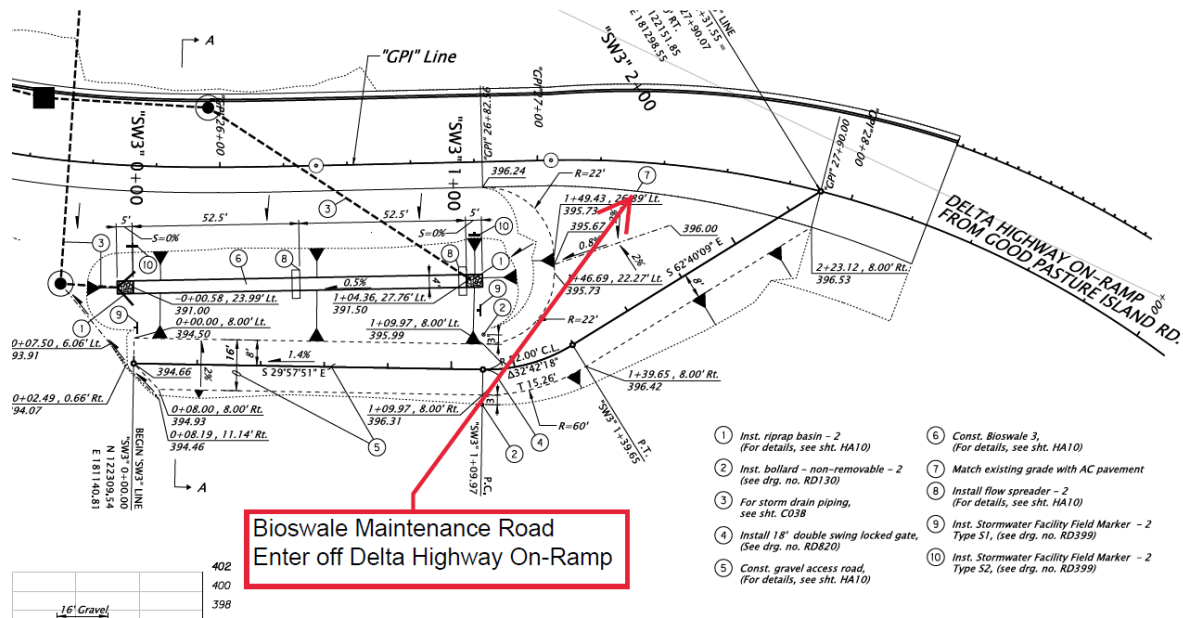


Figure 3: Facility Access (Placeholder)

## 5. Operational Components / Maintenance Items

### Classification

This facility is classified as an:

<input checked="" type="checkbox"/> On-line Swale	<input type="checkbox"/> Off-line Swale
A swale that does not include a high flow bypass component; flow drains into and through the facility	A swale that treats low/small flows and diverts high flows using a bypass component

## Bypass Component

This facility includes a high flow bypass component:

<input checked="" type="checkbox"/> No	<input type="checkbox"/> Yes
There is no bypass component. High flows drains into and through the facility	There is a bypass component. Only low/small flows drain into the swale. High flows are diverted around the swale using a bypass component

## Operational Components

A swale has many components that assist with treatment, conveyance, and reducing flow velocity to minimize erosion. The components in use can vary depending if the facility was designed to operate on-line or off-line. The facility components table (**Table 1**) has been provided to highlight the applicable components for this facility. The component is in use when the box contains an “x” (e.g.  ).

The Standard Operation Manual for Water Quality Biofiltration Swales (implemented March 2017) outlines facility operation, typical footprint configuration, and component definitions and details. A link to the manual is attached to the feature marker in TransGIS.

<https://gis.odot.state.or.us/TransGIS/>

## Operational Plan

The applicable standard operational plan for this facility is:

<input type="checkbox"/> Operational Plan A	<input checked="" type="checkbox"/> Operational Plan B	<input type="checkbox"/> Operational Plan C
An on-line swale with roadside ditches	An on-line swale with piped inlets and outlets	An off-line swale with a piped high flow bypass
A standard operational plan illustrates the general facility footprint configuration and explains the purpose of each facility component. Operational plans (A, B, C) are provided in the Standard Operation Manual.		

See Appendix A for the site specific operational plan.

## Maintenance Items

Operational components marked in **Table 1** should be inspected and maintained according to Section 7. Each facility component is defined and detailed in the Standard Operation Manual using the associated ID number indicated below.

<b>Table 1: Swale Components</b>		<b>ID #</b>
<b>Manholes/Structures</b>		
Pre-treatment manhole	<input type="checkbox"/>	<b>S1</b>
Weir type flow splitter/flow splitter manhole	<input type="checkbox"/>	<b>S2</b>
Orifice type flow splitter/flow splitter manhole	<input type="checkbox"/>	<b>S3</b>
Standard manhole	<input checked="" type="checkbox"/>	<b>S4</b>
<b>Swale Inlet</b>		
Pavement sheet flow	<input type="checkbox"/>	<b>S5</b>
Inlet Pipe (s)	<input checked="" type="checkbox"/>	<b>S6</b>
Open channel inlet	<input type="checkbox"/>	<b>S7</b>
Riprap pad	<input checked="" type="checkbox"/>	<b>S8</b>
<b>Ground Cover</b>		
Grass bottom	<input checked="" type="checkbox"/>	<b>S9</b>
Grass side slopes	<input checked="" type="checkbox"/>	<b>S10</b>
Granular drain rock	<input type="checkbox"/>	<b>S11</b>
Plantings	<input type="checkbox"/>	<b>S12</b>
<b>Underground Components</b>		
Geotextile fabric	<input checked="" type="checkbox"/>	<b>S13</b>
Water quality mix	<input checked="" type="checkbox"/>	<b>S14</b>
Perforated pipe	<input type="checkbox"/>	<b>S15</b>
Porous pavers (access grid)	<input checked="" type="checkbox"/>	<b>S16</b>
<b>Flow Spreader</b>		
Rock basin (used at inlet)	<input checked="" type="checkbox"/>	<b>S17</b>
Anchored board (midpoint of swale or every 50 feet along swale bottom)	<input checked="" type="checkbox"/>	<b>S18</b>
Other:	<input type="checkbox"/>	<b>S19</b>
<b>Swale Outlet</b>		
Catch basin with grate	<input type="checkbox"/>	<b>S20</b>
Outlet Pipe (s)	<input checked="" type="checkbox"/>	<b>S21</b>
Open channel outlet	<input type="checkbox"/>	<b>S22</b>
Auxiliary Outlet:	<input type="checkbox"/>	<b>S23</b>
<b>Outfall Type</b>		
Waterbody (Creek/Lake/Ocean)	<input type="checkbox"/> C	<b>S24</b>
	<input checked="" type="checkbox"/> L	
	<input type="checkbox"/> O	
Ditch	<input type="checkbox"/>	<b>S25</b>
Storm drain system	<input checked="" type="checkbox"/>	<b>S26</b>
<b>Outfall Components</b>		
Riprap pad	<input checked="" type="checkbox"/>	<b>S27</b>
Riprap bank protection	<input type="checkbox"/>	<b>S28</b>

## 6. Maintenance

### Maintenance Frequency/Maintain Records

- a. Inspect annually. Preferably prior to the rainy season.
- b. Clean and maintain as necessary. Refer to Activity 125 for conditions when maintenance is needed.
- c. Keep a record of inspections, maintenance, and repairs.

### Maintenance Guide/Maintenance Actions

The ODOT Routine Road Maintenance Water Quality and Habitat Guide (the *Blue Book*) outlines the standard maintenance actions for water quality facilities under Activity 125.

There are standard maintenance tables for standard ODOT designs. The maintenance tables describe the maintenance component, the defect or problem, the condition when maintenance is needed, and the recommended maintenance to correct the problem. Use the following tables to maintain ODOT swales:

- Table 1 (General Maintenance): Contains general maintenance and inspection guidelines that are applicable to all ODOT water quality facilities
- Table 3 (Maintenance of Water Quality or Biofiltration Swales): Contains maintenance information for swales

The *Blue Book* can be viewed at the following website:

[http://www.oregon.gov/ODOT/Maintenance/Documents/blue\\_book.pdf](http://www.oregon.gov/ODOT/Maintenance/Documents/blue_book.pdf)

## 7. Limitations

Access grid installed:

<input type="checkbox"/> No	<input checked="" type="checkbox"/> Yes
<b>Medium Duty Porous Pavers</b>	

Swales are designed to allow equipment access along the bottom. If an access grid is **NOT** installed, vehicles entering the swale can create depressions (tire ruts), damage vegetation, and damage structural components (e.g. flow spreaders). These conditions may result in poor treatment and drainage performance.

Equipment wheels should be kept on the tops and side slopes. Mower arms may be run along the swale bottom.



## 8. Waste Material Handling

Material removed from the facility is defined as waste by the Department of Environmental Quality (DEQ). Refer to the roadwaste section of the ODOT Maintenance Yard Environmental Management System (EMS) Policy and Procedures Manual for disposal options:

[http://www.oregon.gov/ODOT/Maintenance/Documents/ems\\_manual.pdf](http://www.oregon.gov/ODOT/Maintenance/Documents/ems_manual.pdf)



Contact any of the following for more detailed information about management of waste materials found on site:

ODOT Clean Water Unit	(503) 986-3008
ODOT Statewide Hazmat Coordinator	(503) 667-7442
ODOT Region 1 Hazmat Coordinator	(503) 731-8290
ODOT Region 2 Hazmat Coordinator	(503) 986-2647
ODOT Region 3 Hazmat Coordinator	(541) 957-3594
ODOT Region 4 Hazmat Coordinator	(541) 388-6186
ODOT Region 5 Hazmat Coordinator	(541) 963-1590
ODEQ Northwest Region Office	(503) 229-5263

## **A Appendix A – Site Specific Operational Plan**

### **Contents:**

**Operational Plan: DFI D01208**

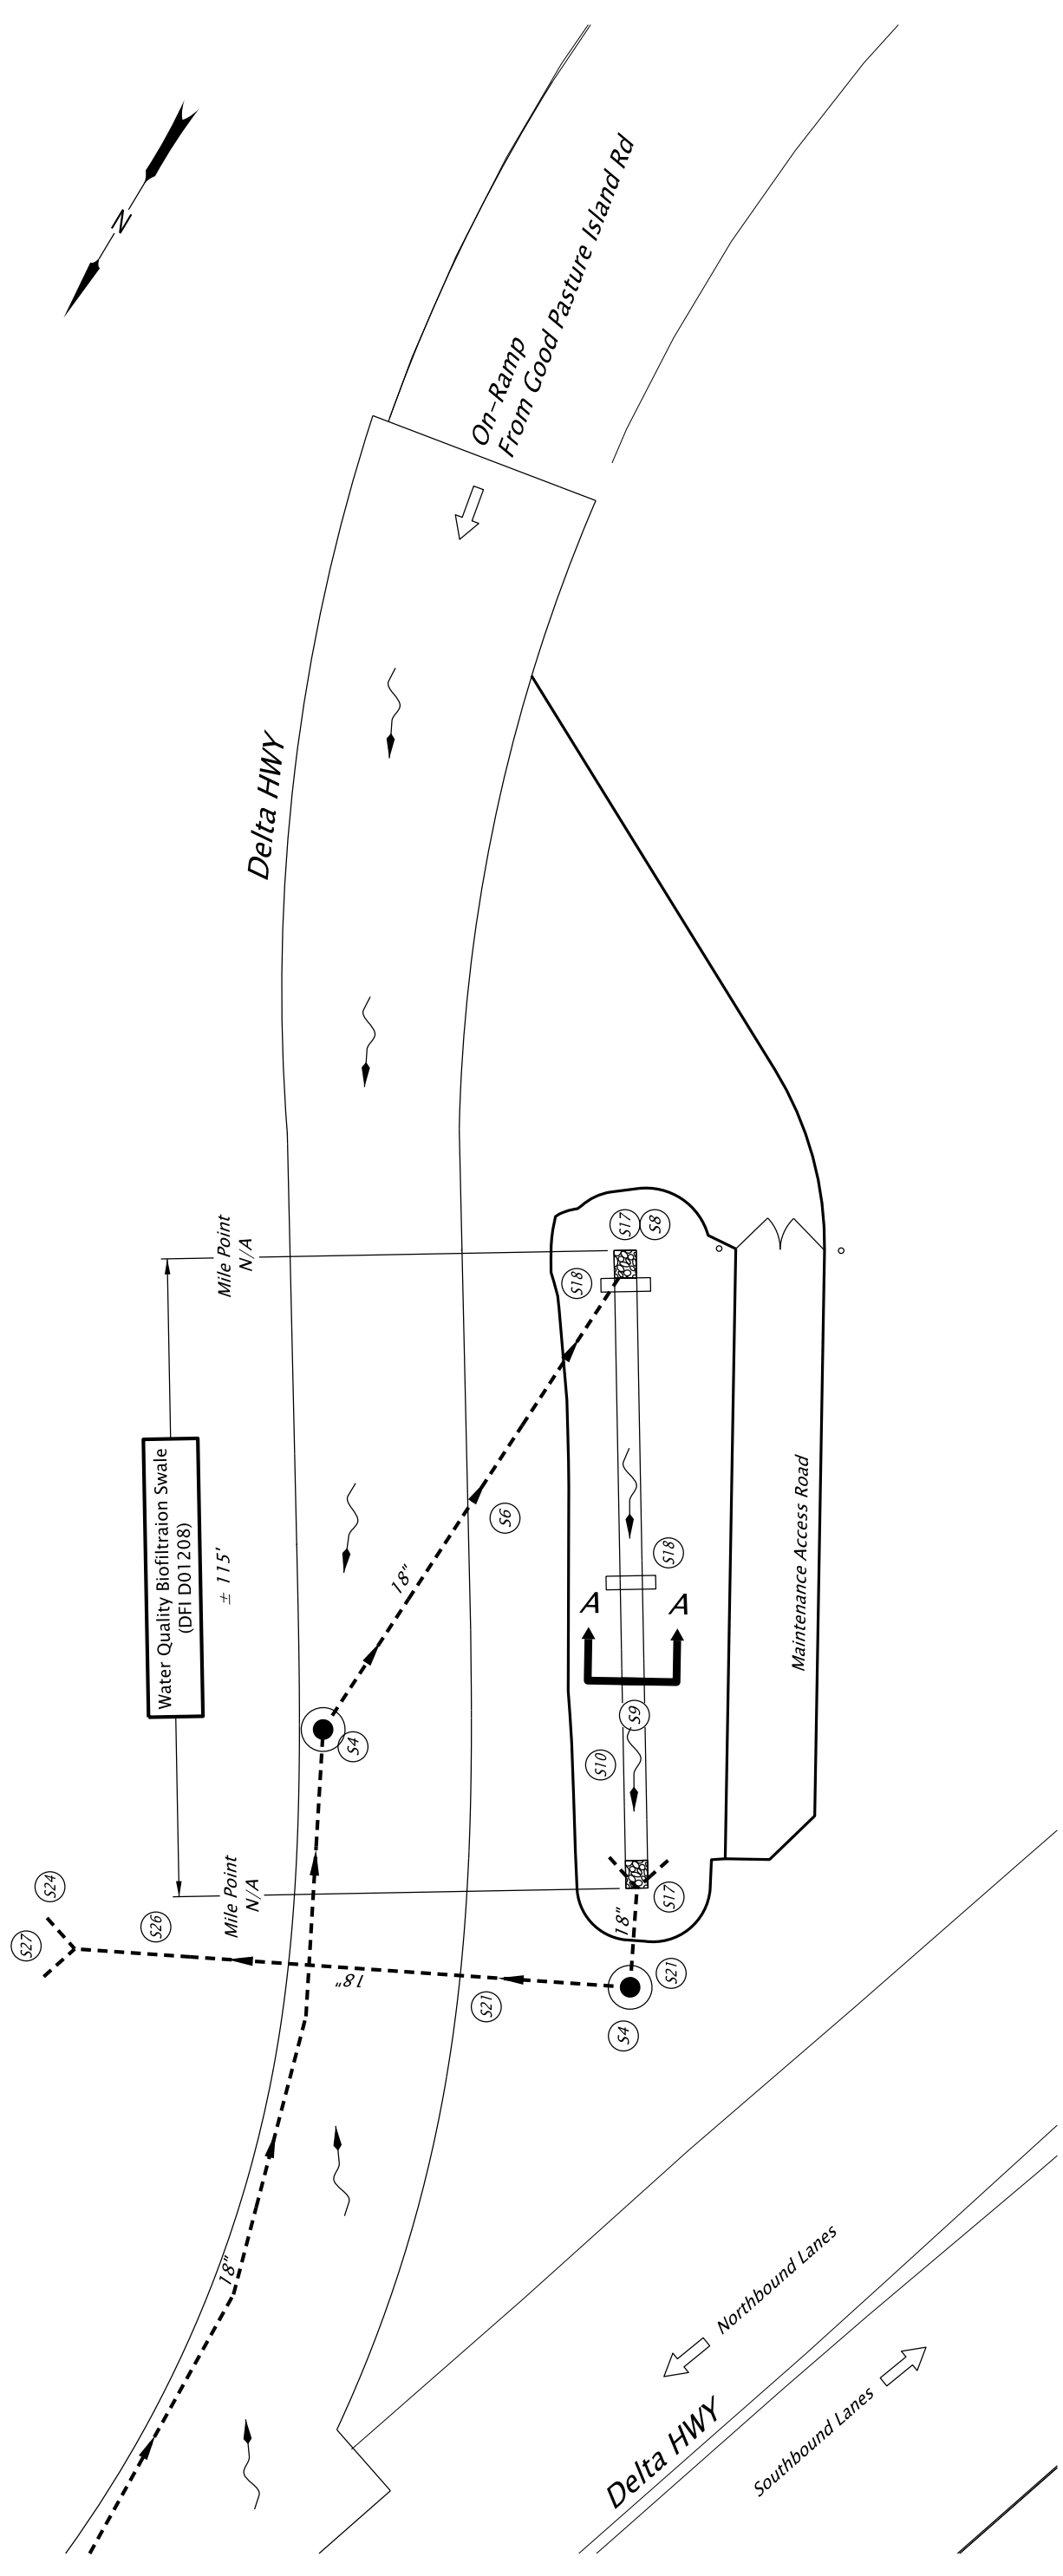

PLAN  
N.T.S.

- LEGEND:
- (S#) Swale Component  
(See Table 1 in O&M Manual)
  - Manhole
  - Inlet
  - Storm Pipe (Facility)
  - ▲ Conveyance Direction
  - ~ Pavement / Facility Flow Path
  - ⇨ Highway Lane Direction


Sht. 1 of 2

OREGON DEPARTMENT OF TRANSPORTATION


**DFI D01208**  
**MAINTENANCE DISTRICT 05 HWY OR569**  
**WATER QUALITY BIOFILTRATION SWALE**  
 BELTLINE HIGHWAY  
 LANE COUNTY

Prepared By: R. Attenasio



Drafted By: M. Wainwright

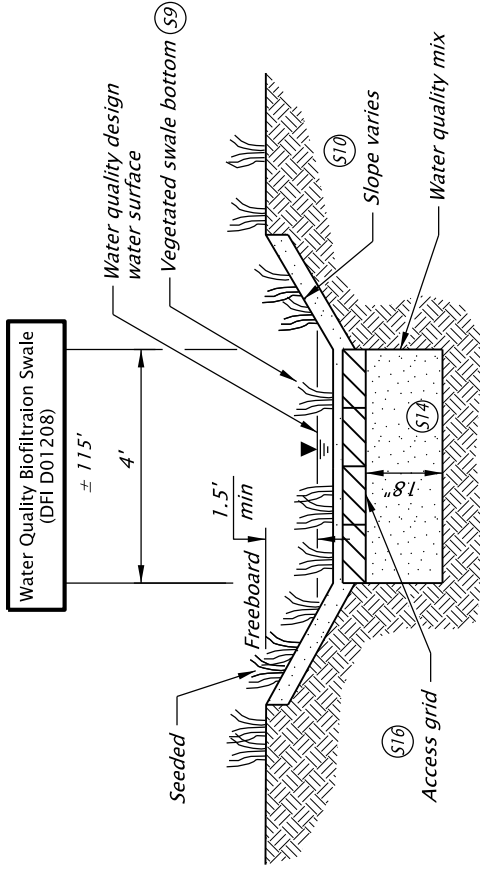

SECTION A-A  
N.T.S.

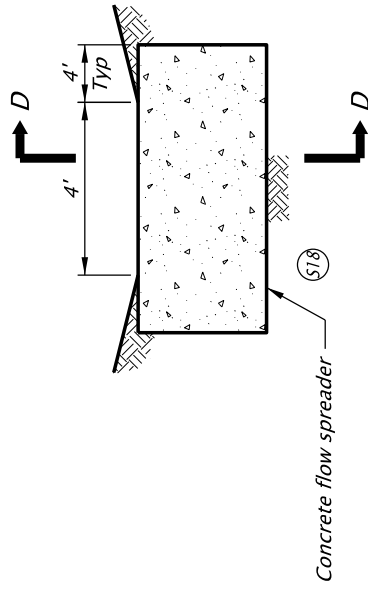

FLOW SPREADER  
N.T.S.

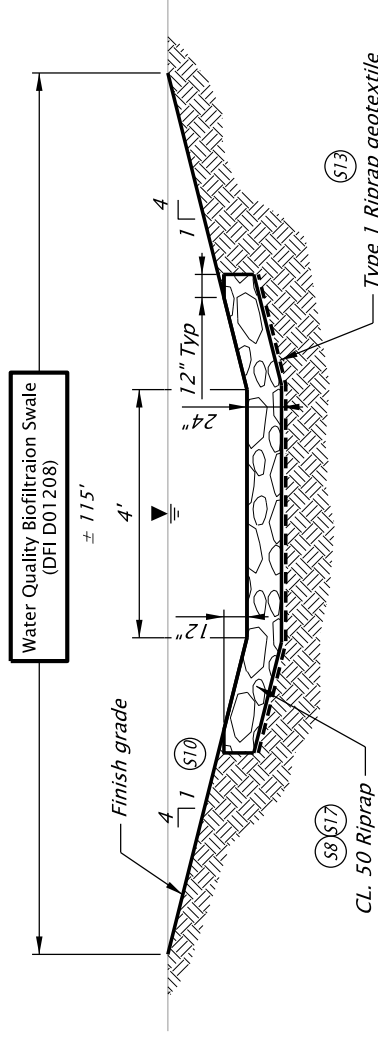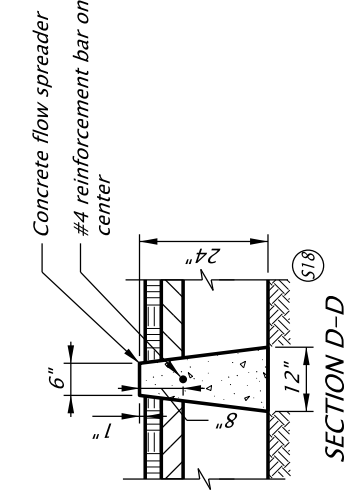

RIPRAP BASIN  
N.T.S.

## **B Appendix B – Project Contract Plans**

### **Contents:**

**Site Specific Subset of Project Contract Plan 52V-27**

STATE OF OREGON  
DEPARTMENT OF TRANSPORTATION

PLANS FOR PROPOSED PROJECT

GRADING, DRAINAGE, STRUCTURES, PAVING, SIGNING, ILLUMINATION,  
SIGNALS, ITS & ROADSIDE DEVELOPMENT

**OR569: BELTLINE @**


**DELTA HIGHWAY - INTERCHANGE SEC.**

BELTLINE HIGHWAY

LANE COUNTY  
FEBRUARY 2019


Length Of Project : 0.6 Miles

INDEX OF SHEETS	
SHEET NO.	DESCRIPTION
A01	Title Sheet
A02	Title Sheet
A03	Title Sheet
A04	Plan Sheet Layout

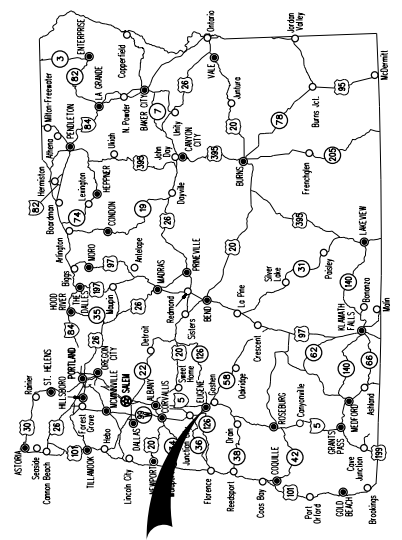

BEGINNING OF PROJECT  
STA. "NW" 100+00  
(OR 569 MP 10.04)

BEGINNING OF PROJECT  
STA. "DH" 416+00

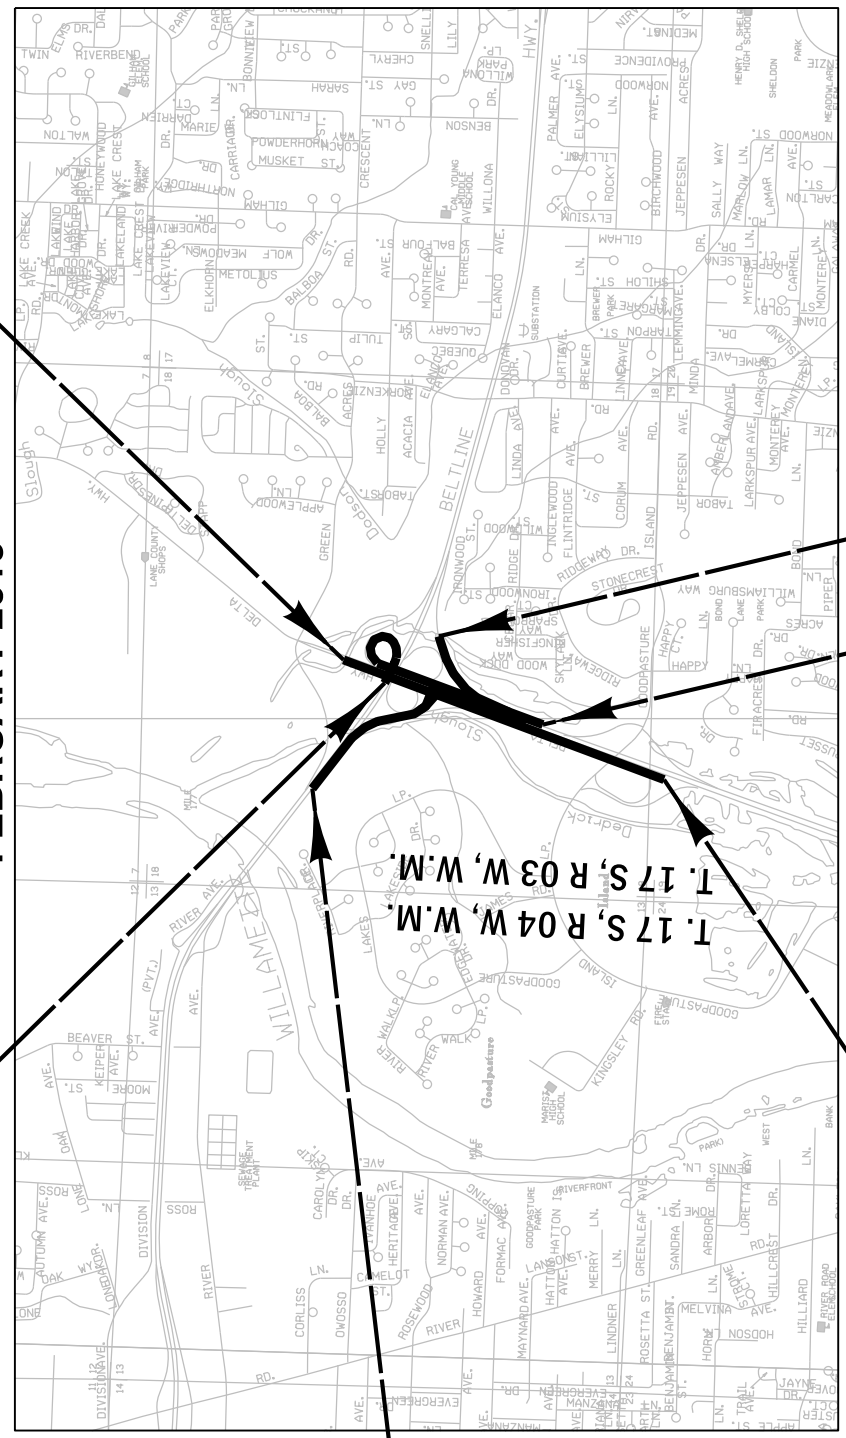


BEGINNING OF PROJECT  
STA. "EN" 200+00  
(OR 569 MP 9.73)

END OF PROJECT  
STA. "DH" 447+00

END OF PROJECT  
STA. "NW" 126+21.52

BEGINNING OF PROJECT  
STA. "NE" 10+75.00



T. 17 S, R. 03 W, W.M.  
T. 17 S, R. 04 W, W.M.

**ATTENTION:**  
Oregon Law Requires You To Follow Rules Adopted By The Oregon Utility Notification Center. Those Rules Are Set Forth In OAR 952-001-0010 Through OAR 952-001-0090. You May Obtain Copies Of The Rules By Calling The Center. (Note: The Telephone Number For The Oregon Utility Center Is (503) 232-1987.)

LET'S ALL  
WORK TOGETHER  
TO MAKE THIS  
JOB SAFE

**OREGON TRANSPORTATION COMMISSION**

CHAIR  
Tommy Boney

COMMISSIONER  
Bob Van Brocklin

COMMISSIONER  
Alando Simpson

COMMISSIONER  
Marfin Callery

COMMISSIONER  
Julie Brown

DIRECTOR OF TRANSPORTATION  
Matthew L. Garrett

These plans were developed using ODOT design standards. Exceptions to these standards, if any, have been submitted and approved by the ODOT Chief Engineer or their delegated authority.


Approving Authority: \_\_\_\_\_  
Signature & date

Print name and title \_\_\_\_\_

Concurrence By ODOT Chief Engineer \_\_\_\_\_

**OR569:  
BELTLINE @  
DELTA HIGHWAY - INTERCHANGE SEC.**  
BELTLINE HIGHWAY  
LANE COUNTY

FEDERAL HIGHWAY ADMINISTRATION	PROJECT NUMBER	SHEET NO.
OREGON DIVISION	SO-S069(019)	1A

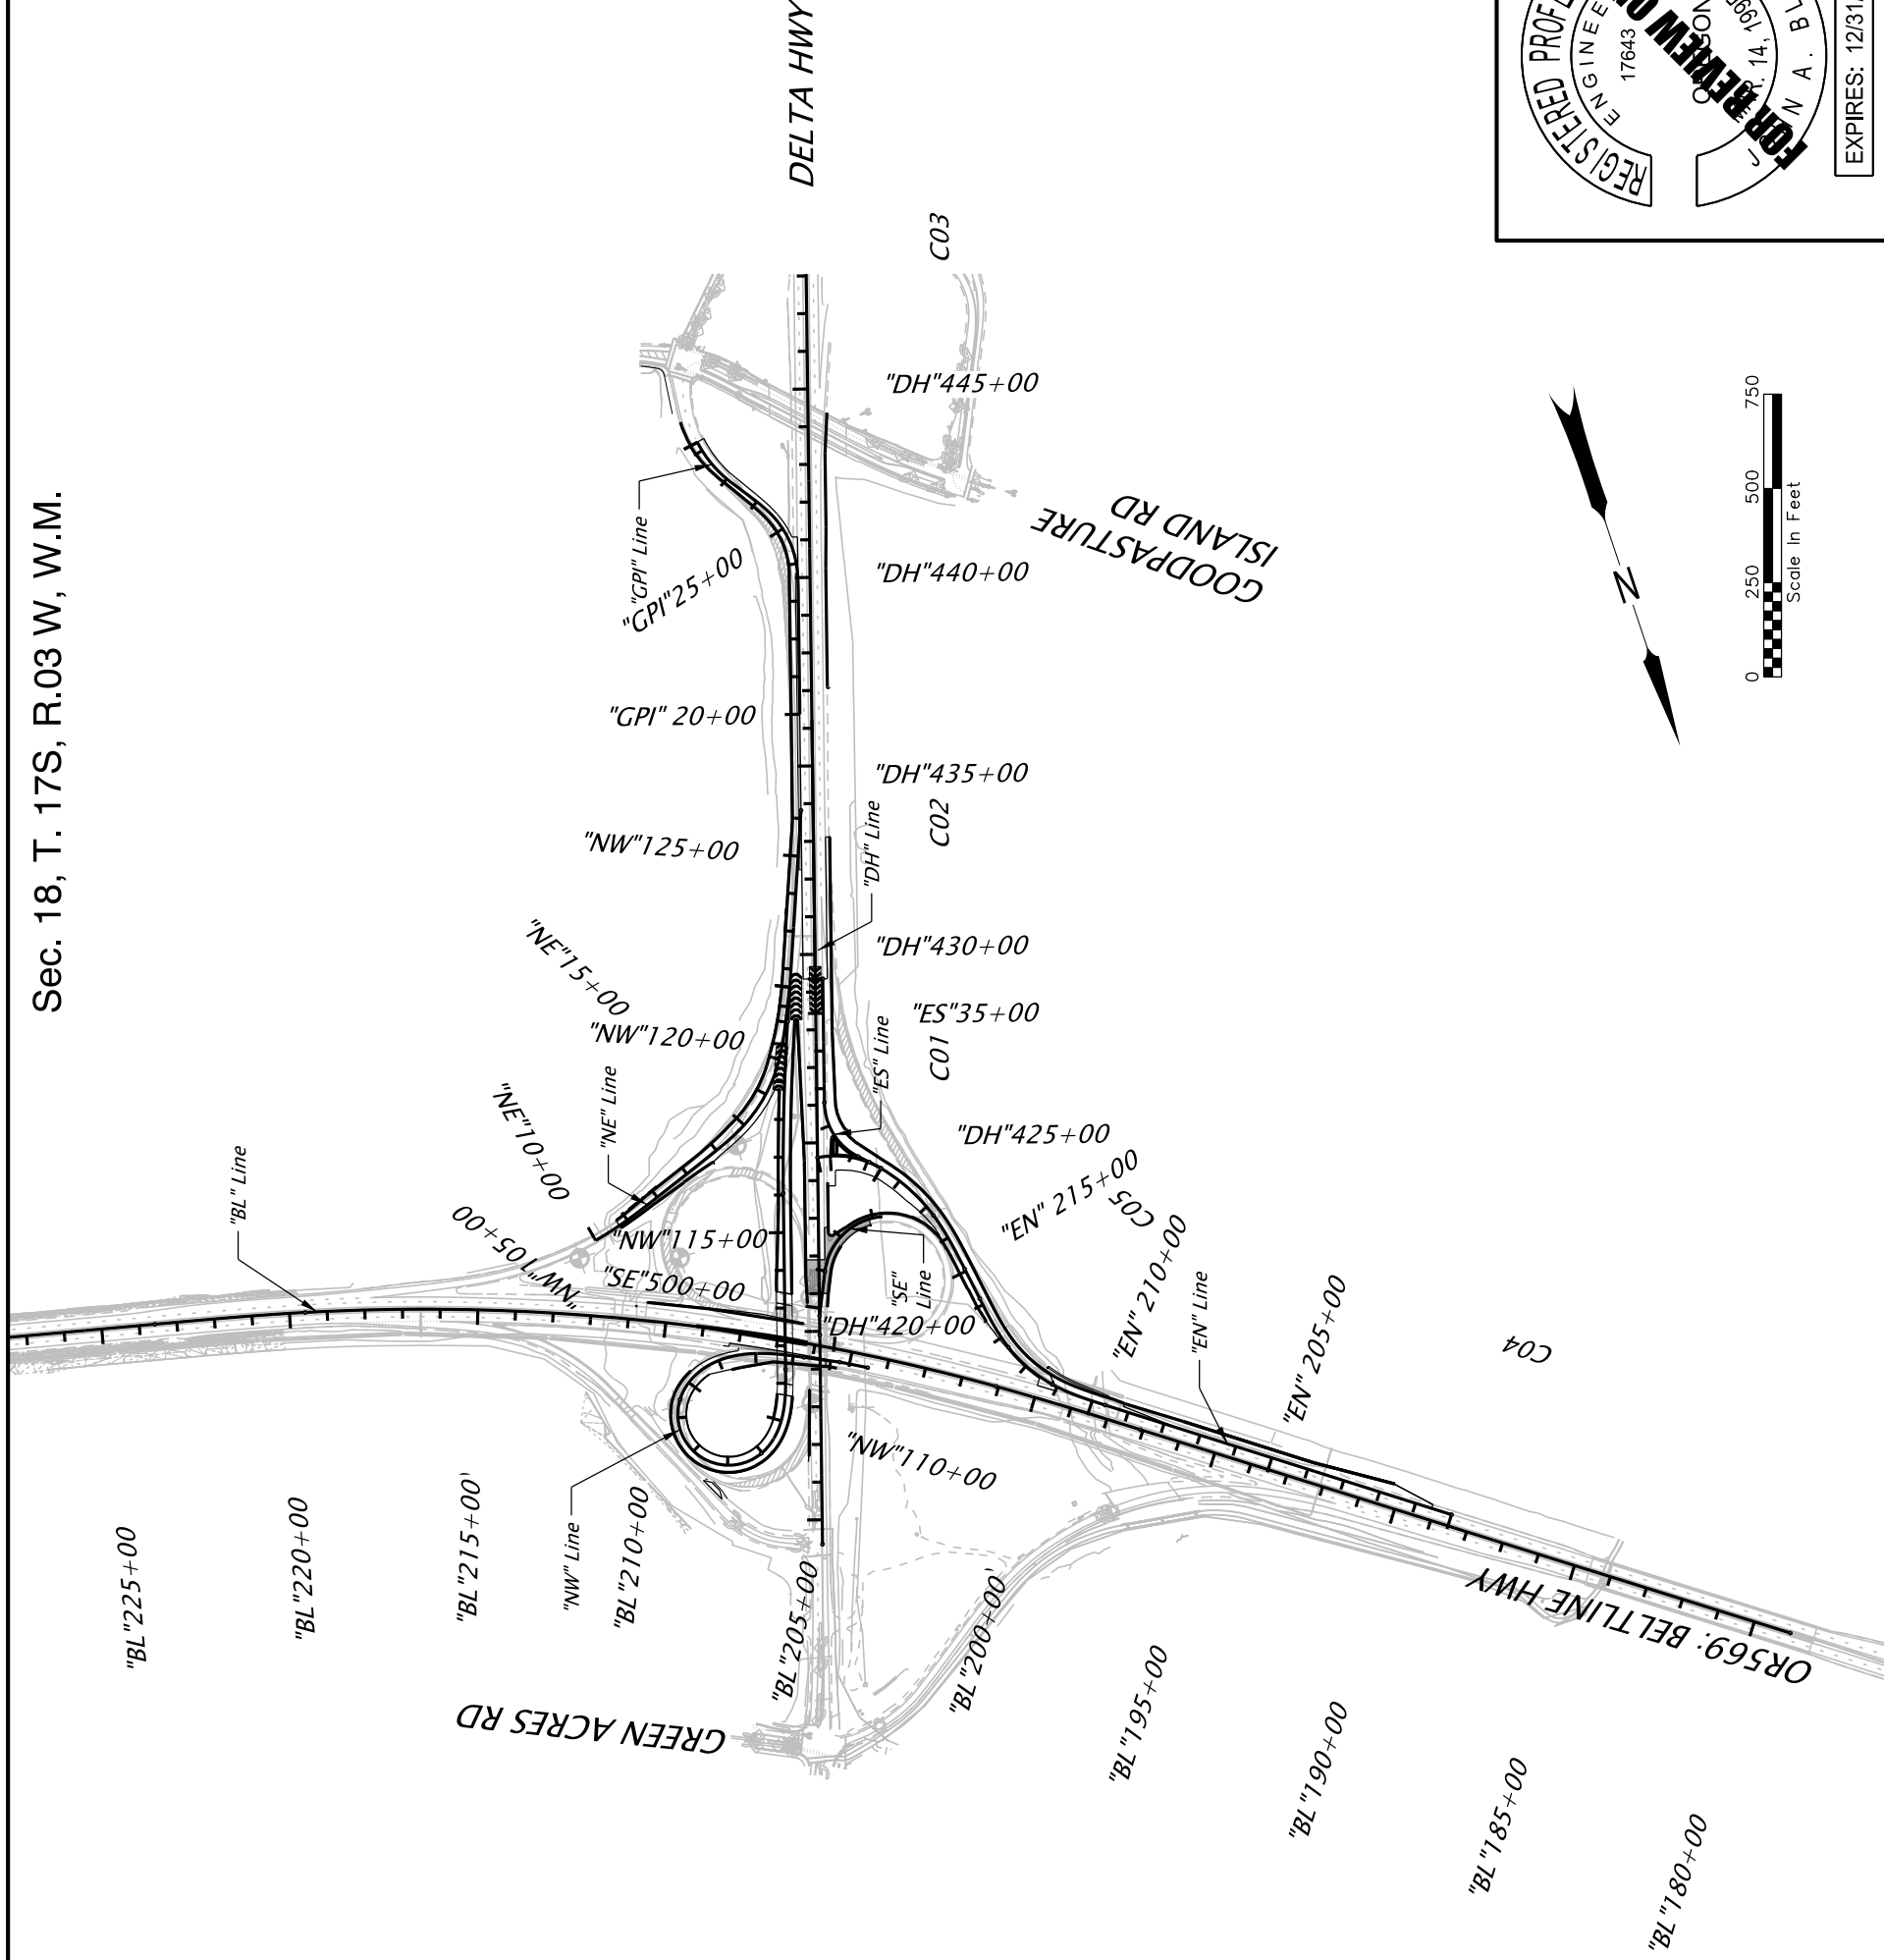

**REGISTERED PROFESSIONAL ENGINEER**  
 17643  
**FOR REVIEW ONLY**  
 M. A. B. L. A. N. D.  
 O. N. O. N.  
 N. O. V. 14, 1995

**EXPIRES: 12/31/2019**

**ch2m**  
 2020 SW 4TH AVE. - 3RD FLOOR  
 PORTLAND, OR 97201-4953  
 TEL. 503.235.5000


**OR569: BELTLINE @ DELTA HIGHWAY - INTERCHANGE SEC.**  
 BELTLINE HIGHWAY  
 LANE COUNTY


Designer: B. Niameogo  
 Drafter: M. Wainscott

Reviewer: S. Litchfield  
 Checker: J. Bland

**PLAN SHEET LAYOUT**

SHEET NO. A04

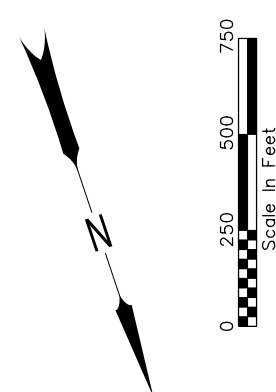

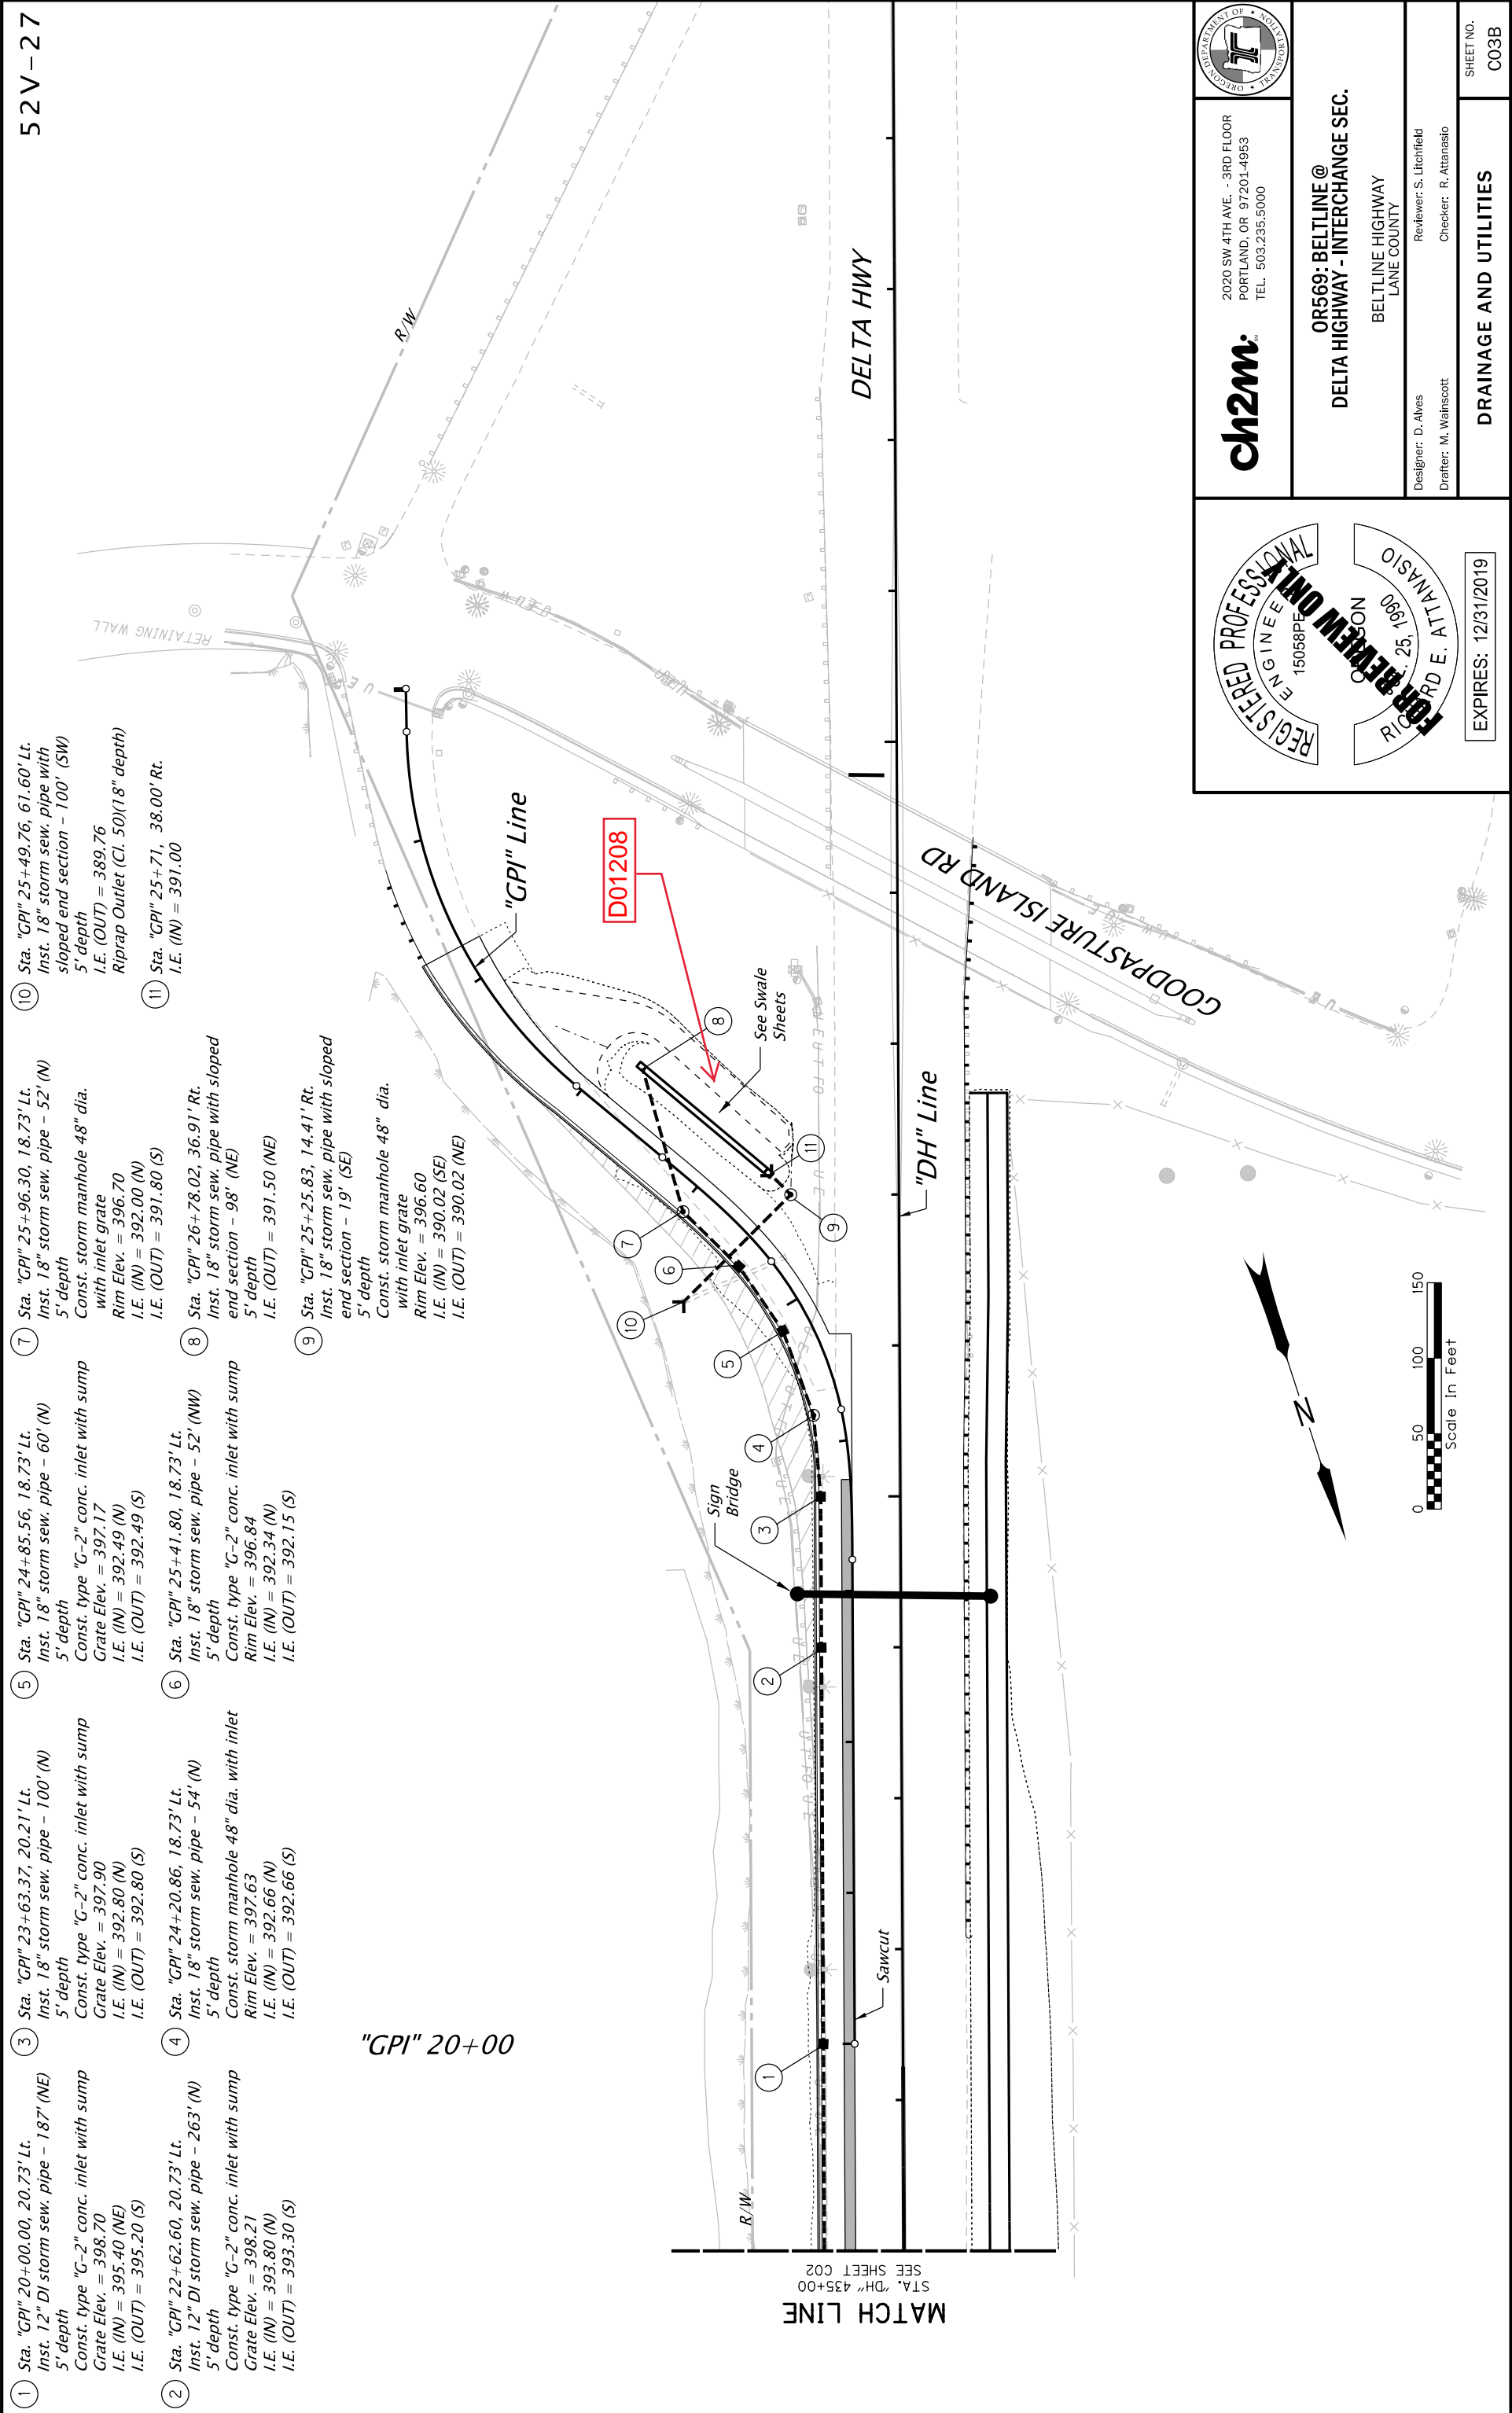

- ① Sta. "GPI" 20+00.00, 20.73' Lt.  
Inst. 12" DI storm sew. pipe - 187' (NE)  
5' depth  
Const. type "G-2" conc. inlet with sump  
Grate Elev. = 398.70  
I.E. (IN) = 395.40 (NE)  
I.E. (OUT) = 395.20 (S)
- ② Sta. "GPI" 22+62.60, 20.73' Lt.  
Inst. 12" DI storm sew. pipe - 263' (N)  
5' depth  
Const. type "G-2" conc. inlet with sump  
Grate Elev. = 398.21  
I.E. (IN) = 393.80 (N)  
I.E. (OUT) = 393.30 (S)
- ③ Sta. "GPI" 23+63.37, 20.21' Lt.  
Inst. 18" storm sew. pipe - 100' (N)  
5' depth  
Const. type "G-2" conc. inlet with sump  
Grate Elev. = 397.90  
I.E. (IN) = 392.80 (N)  
I.E. (OUT) = 392.80 (S)
- ④ Sta. "GPI" 24+20.86, 18.73' Lt.  
Inst. 18" storm sew. pipe - 54' (N)  
5' depth  
Const. storm manhole 48" dia. with inlet  
Rim Elev. = 397.63  
I.E. (IN) = 392.66 (N)  
I.E. (OUT) = 392.66 (S)
- ⑤ Sta. "GPI" 24+85.56, 18.73' Lt.  
Inst. 18" storm sew. pipe - 60' (N)  
5' depth  
Const. type "G-2" conc. inlet with sump  
Grate Elev. = 397.17  
I.E. (IN) = 392.49 (N)  
I.E. (OUT) = 392.49 (S)
- ⑥ Sta. "GPI" 25+41.80, 18.73' Lt.  
Inst. 18" storm sew. pipe - 52' (NW)  
5' depth  
Const. type "G-2" conc. inlet with sump  
Rim Elev. = 396.84  
I.E. (IN) = 392.34 (N)  
I.E. (OUT) = 392.15 (S)
- ⑦ Sta. "GPI" 25+96.30, 18.73' Lt.  
Inst. 18" storm sew. pipe - 52' (N)  
5' depth  
Const. storm manhole 48" dia. with inlet grate  
Rim Elev. = 396.70  
I.E. (IN) = 392.00 (N)  
I.E. (OUT) = 391.80 (S)
- ⑧ Sta. "GPI" 26+78.02, 36.91' Rt.  
Inst. 18" storm sew. pipe with sloped end section - 98' (NE)  
5' depth  
I.E. (OUT) = 391.50 (NE)
- ⑨ Sta. "GPI" 25+25.83, 14.41' Rt.  
Inst. 18" storm sew. pipe with sloped end section - 19' (SE)  
5' depth  
Const. storm manhole 48" dia. with inlet grate  
Rim Elev. = 396.60  
I.E. (IN) = 390.02 (SE)  
I.E. (OUT) = 390.02 (NE)
- ⑩ Sta. "GPI" 25+49.76, 61.60' Lt.  
Inst. 18" storm sew. pipe with sloped end section - 100' (SW)  
5' depth  
I.E. (OUT) = 389.76  
Riprap Outlet (Cl. 50)(18" depth)
- ⑪ Sta. "GPI" 25+71, 38.00' Rt.  
I.E. (IN) = 391.00

"GPI" 20+00

MATCH LINE  
STA. "DH" 435+00  
SEE SHEET C02


2020 SW 4TH AVE. - 3RD FLOOR  
PORTLAND, OR 97201-4953  
TEL. 503.235.5000

**OR569: BELTLINE @ DELTA HIGHWAY - INTERCHANGE SEC.**

BELTLINE HIGHWAY  
LANE COUNTY



Designer: D. Alves  
Drafter: M. Wainscott  
Reviewer: S. Litchfield  
Checker: R. Attanasio

SHEET NO.  
**C03B**

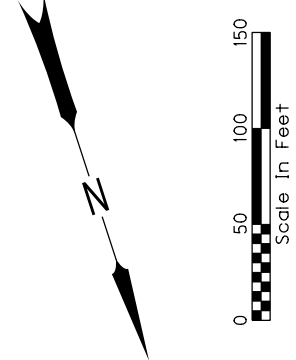



"GPI" Line

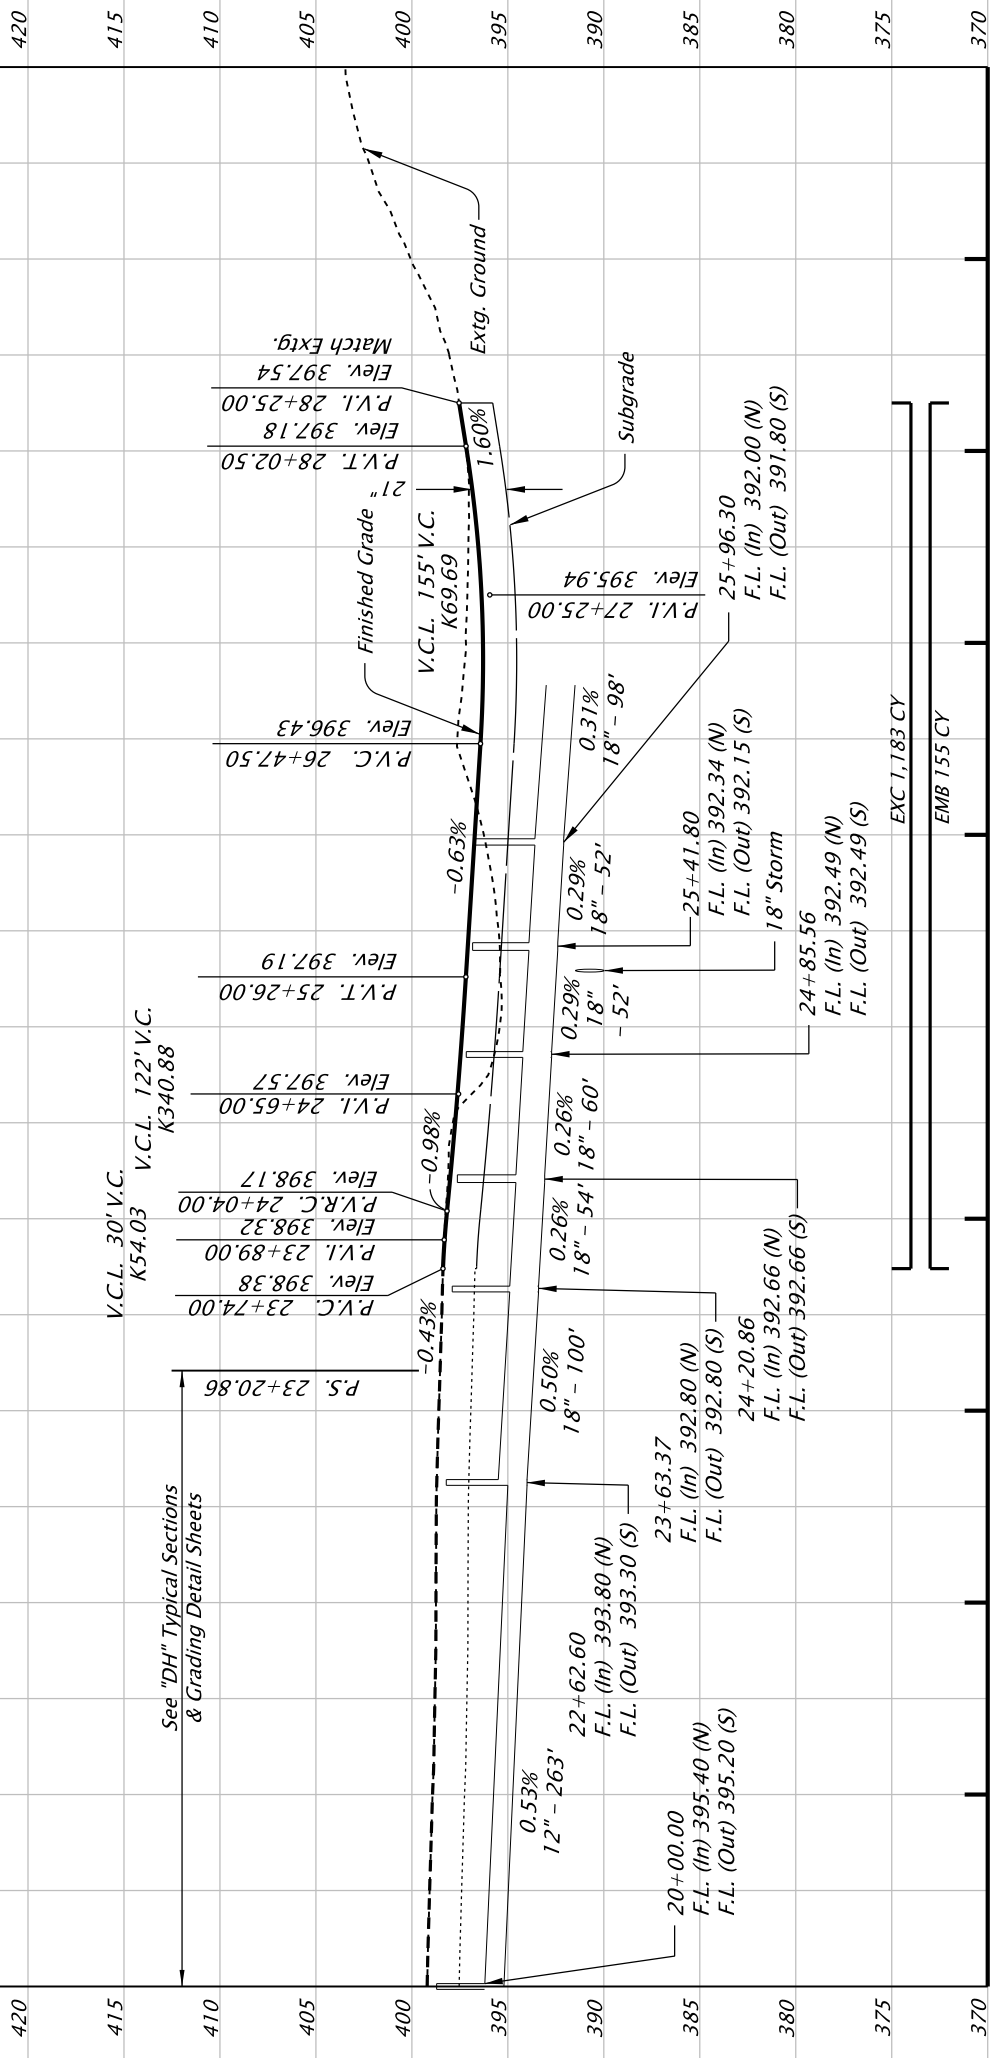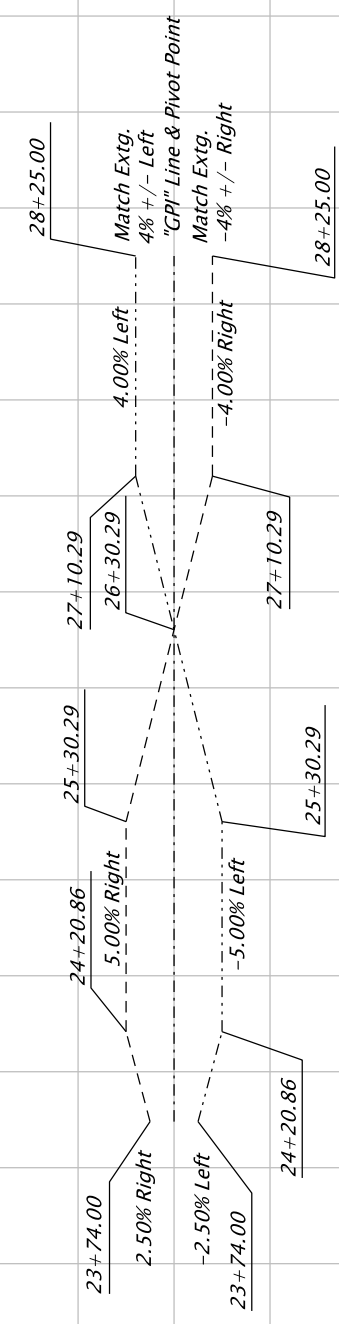

"GPI"25+00

"GPI"20+00

2020 SW 4TH AVE. - 3RD FLOOR  
 PORTLAND, OR 97201-4953  
 TEL. 503.235.5000

**OR569: BELTLINE @ DELTA HIGHWAY - INTERCHANGE SEC.**  
 BELTLINE HIGHWAY  
 LANE COUNTY

Designer: B. Niamogo  
 Drafter: M. Wainwright  
 Reviewer: S. Litchfield  
 Checker: J. Bland


**PROFILE**

SHEET NO. C03C


**REGISTERED PROFESSIONAL ENGINEER**  
 ROADWAY  
 17643  
 FOR REVIEW ONLY  
 NO. 17,195  
 J. A. BLAND

**REGISTERED PROFESSIONAL ENGINEER**  
 DRAINAGE  
 15058PE  
 FOR REVIEW ONLY  
 NO. 52,190  
 R. E. ATTANASIO



EXPIRES: 12/31/2019



BIOSWALE 3 PLAN  
DFI #: D01208

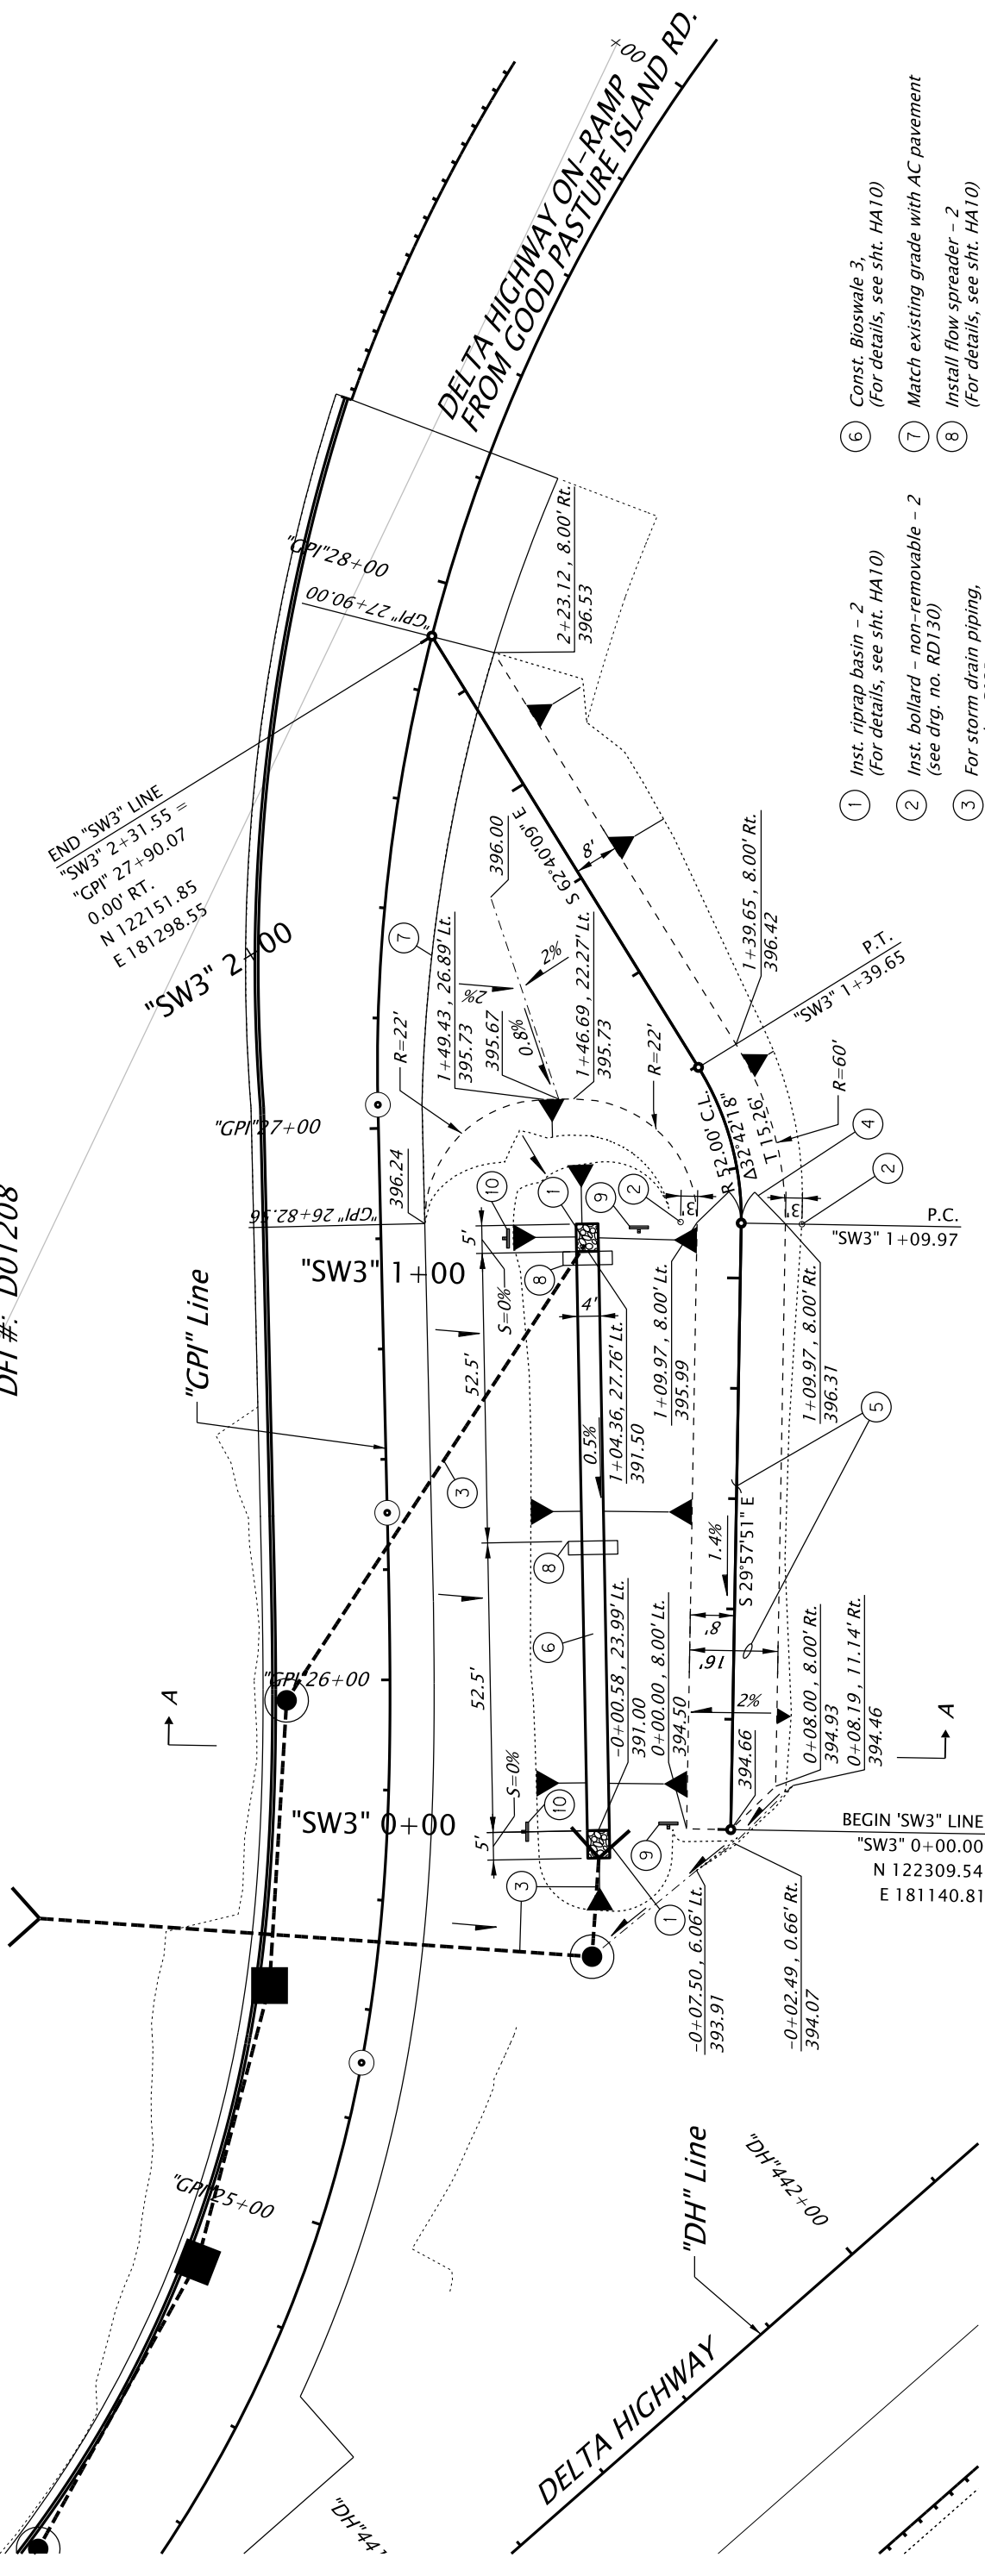

- 1 Inst. riprap basin - 2 (For details, see sht. HA10)
- 2 Inst. bollard - non-removable - 2 (see drg. no. RD130)
- 3 For storm drain piping, see sht. C038
- 4 Inst. 18" double swing locked gate, (See drg. no. RD820)
- 5 Const. gravel access road, (For details, see sht. HA10)
- 6 Const. Bioswale 3, (For details, see sht. HA10)
- 7 Match existing grade with AC pavement (For details, see sht. HA10)
- 8 Install flow spreader - 2 (For details, see sht. HA10)
- 9 Inst. Stormwater Facility Field Marker - 2 Type S1, (see drg. no. RD399)
- 10 Inst. Stormwater Facility Field Marker - 2 Type S2, (see drg. no. RD399)

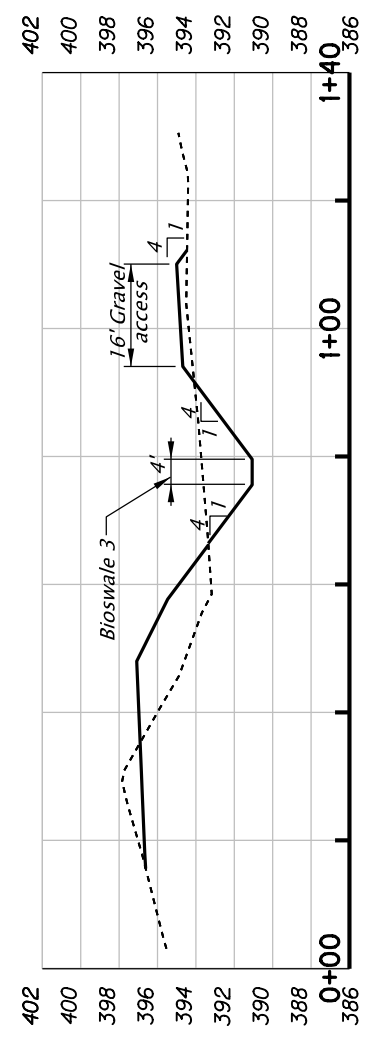

2020 SW 4TH AVE. - 3RD FLOOR  
PORTLAND, OR 97201-4953  
TEL. 503.235.5000

**OR569: BELTLINE@**  
**DELTA HIGHWAY - INTERCHANGE SEC.**

BELTLINE HIGHWAY  
LANE COUNTY


Designer: M. Little  
Reviewer: S. Litchfield  
Checker: R. Atanasio  
Drafter: J. Pfeifer

**REGISTERED PROFESSIONAL ENGINEER**  
15058PE  
**FOR BUREAU ONLY**  
RICHARD E. ATTANASIO

EXPIRES: 12/31/2019


**WATER QUALITY**


SHEET NO.  
**HA05**

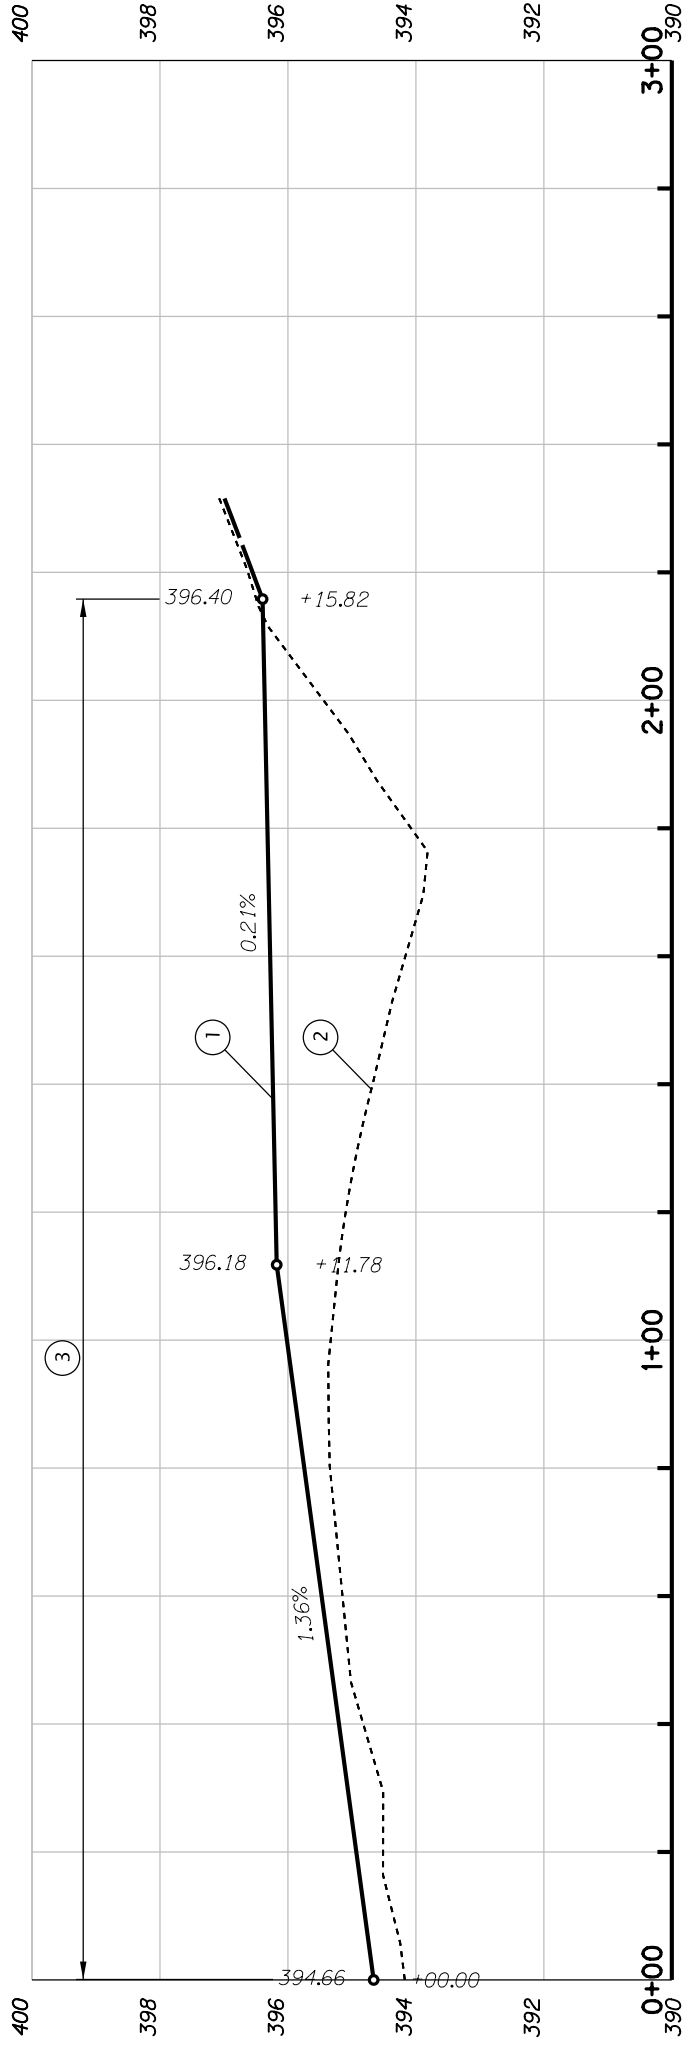


- ① Finish grade
- ② Existing grade
- ③ Gravel access road

PROFILE "SW3"





2020 SW 4TH AVE. - 3RD FLOOR  
PORTLAND, OR 97201-4953  
TEL. 503.235.5000

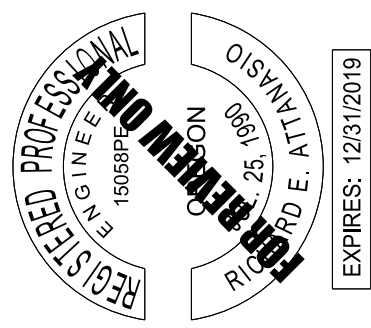

---

**OR569: BELTLINE @ DELTA HIGHWAY - INTERCHANGE SEC.**

BELTLINE HIGHWAY  
LANE COUNTY



---

Designer: M. Little      Reviewer: S. Litchfield  
Drafter: J. Pfeifer      Checker: R. Attanasio



---

**WATER QUALITY**




SHEET NO.  
**HA06**

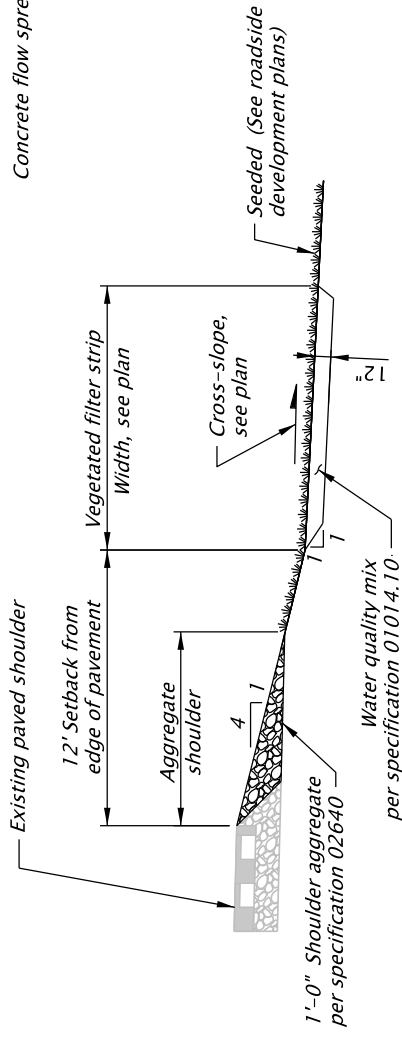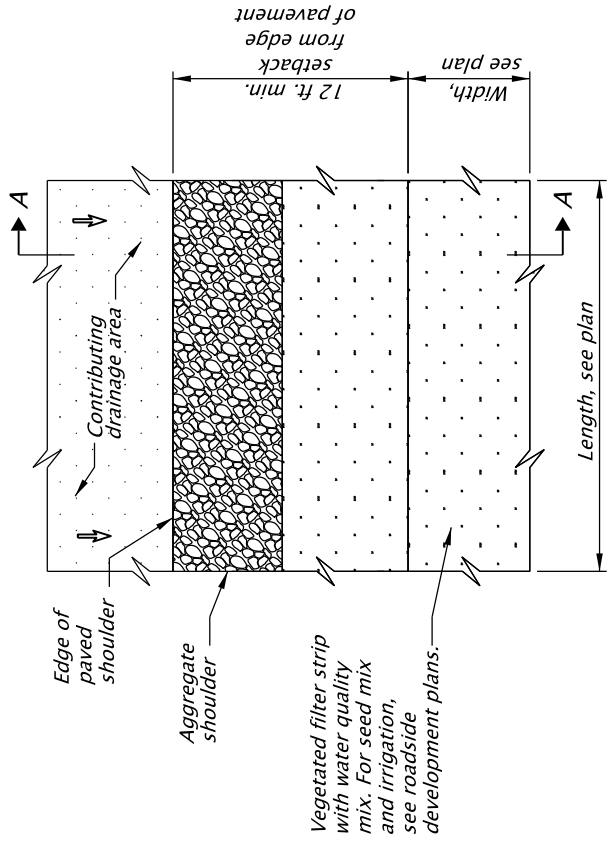

**FILTER STRIP**  
NTS

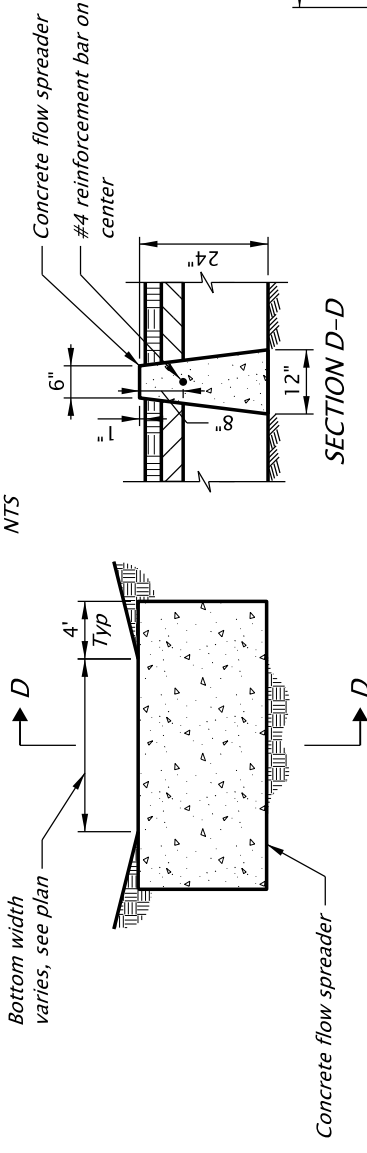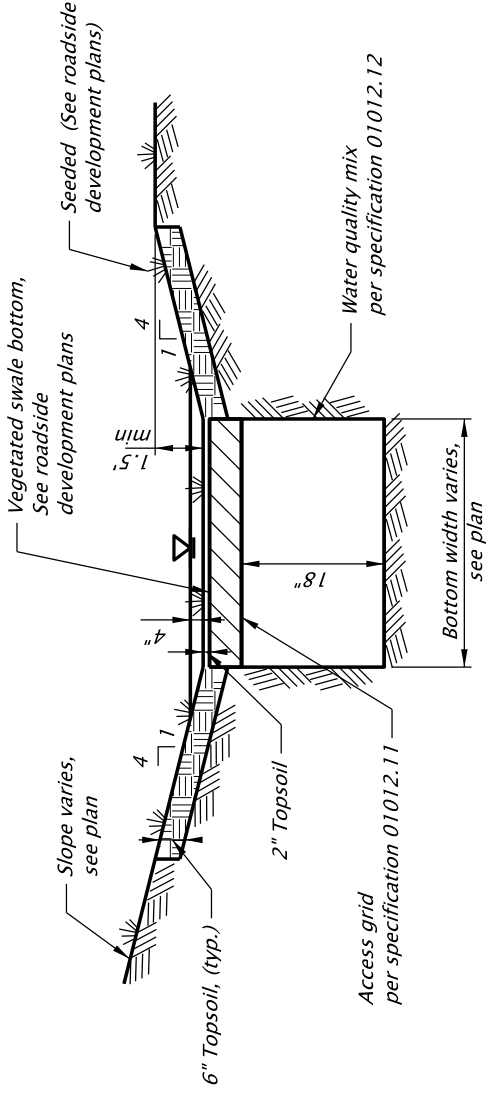

**FLOW SPREADER**  
NTS

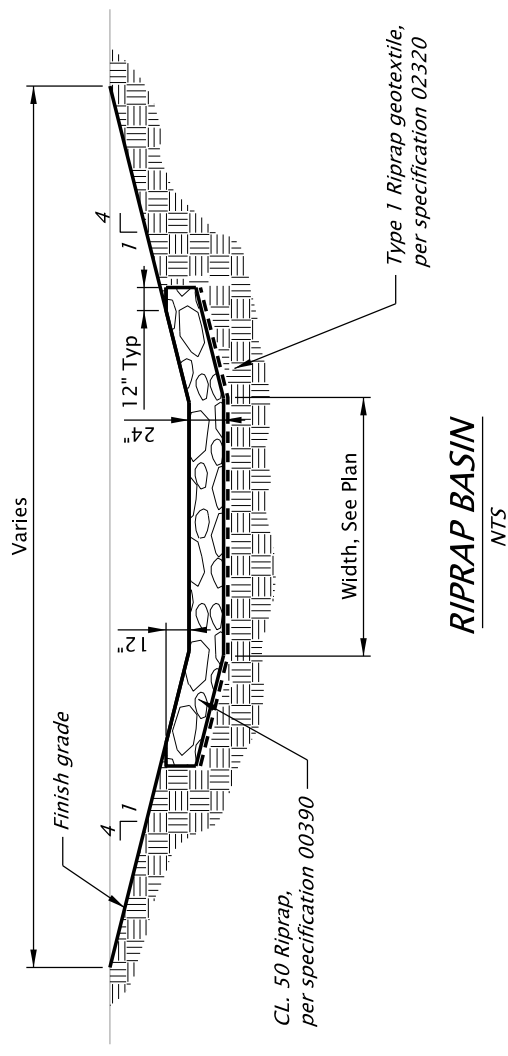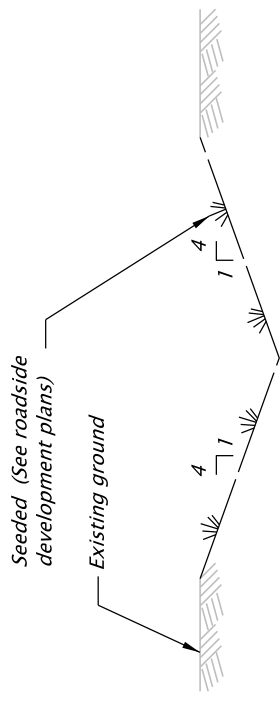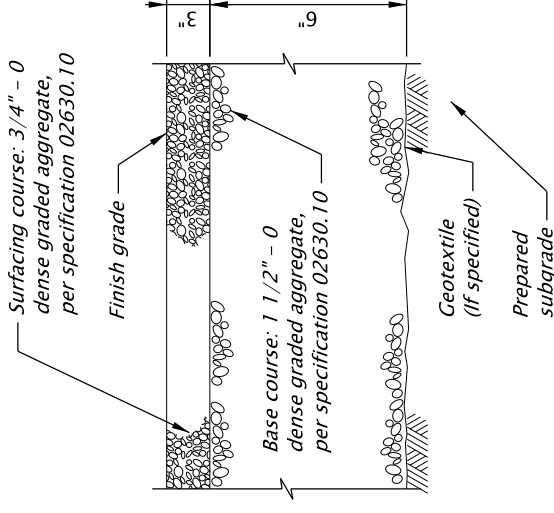

2020 SW 4TH AVE. - 3RD FLOOR  
 PORTLAND, OR 97201-4953  
 TEL. 503.235.5000

**OR569: BELTLINE @ DELTA HIGHWAY - INTERCHANGE SEC.**  
 BELTLINE HIGHWAY  
 LANE COUNTY

Designer: M. Little  
 Drafter: J. Pfeiffer  
 Reviewer: S. Litchfield  
 Checker: R. Attanasio

SHEET NO.  
HA10

**REGISTERED PROFESSIONAL ENGINEER**  
 15058PE  
 RICHARD E. ATTANASIO  
 EXPIRES: 12/31/2019